


HF16XA-5M

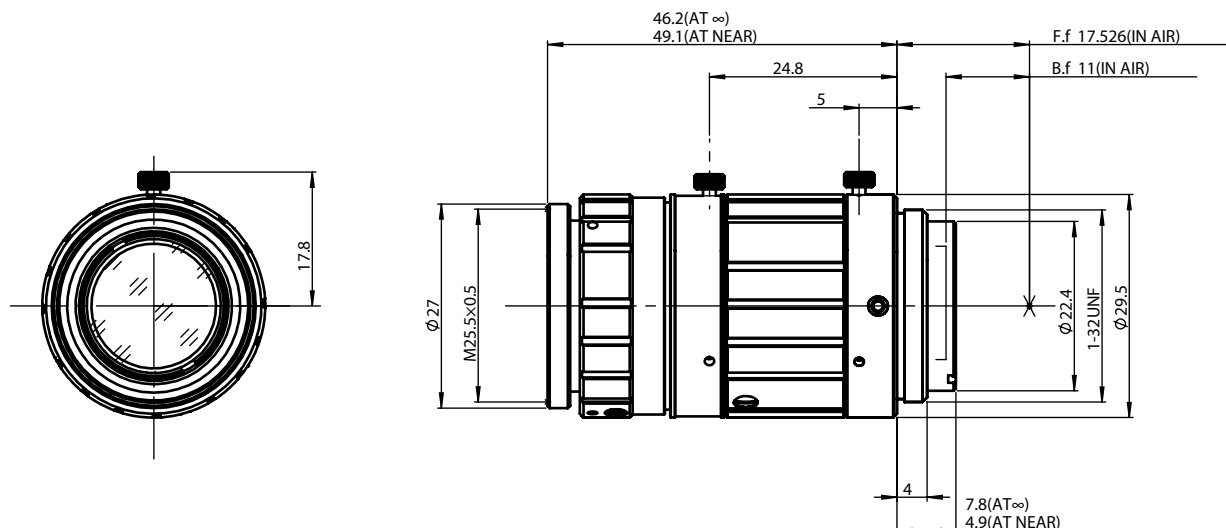

ver3.0E

型番	Product Name	HF16XA-5M
焦点距離[mm]	Focal length [mm]	16
絞り範囲(F no)	Iris range (F. no)	(15.87)
画角 (H x V)	Angle of view	F1.6-F16
フォーカス範囲 (レンズメカ先端より) [mm]	Working distance (from front of lens barrel) [mm]	31.4°×23.7° (2/3")
操作方法:フォーカス	Operation of focus	∞ -100
操作方法:アイリス	Operation of iris	Manual
フィルタ径 [mm]	Filter thread [mm]	Manual
マウント	Mount	M25.5 x 0.5
質量(約) [g]	Weight (approx.) [g]	C-mount
適合センサーサイズ(最大)	Sensor size (max.)	71
バックフォーカス (空気換算長) [mm]	Back focal distance (in air) [mm]	1/1.2"
フランジバック [mm]	Flange back [mm]	10.66
射出瞳位置 (結像面より) [mm]	Exit pupil position (from image plane) [mm]	17.526
前側主点 (マウント面から)	Front principle point (from Mount)	-206.22
後側主点 (マウント面から)	Rear principle point (from Mount)	-12.33
二点間の距離 (主点間隔)	Distance between the pincipal points	1.65
TVディストーション [%]	TV distortion [%]	14.13
外径寸法 [mm]	Dimension [mm]	-0.60
周辺光量(開放・隅)	Relative illumination (Apeture: at full open, Image heigh: at diaconal)	$\phi 29.5 \times 46.0$
使用温度範囲	Operation Temperature	48
		-10℃~50℃

These specifications are subject to change without notice.

01-Apr-17

Distributed by: **MaxxVision®**

Sigmaringer Str. 121
 70567 Stuttgart
 Tel.: 0711 997 996 3
 www.maxxvision.com