


HF35XA-5M

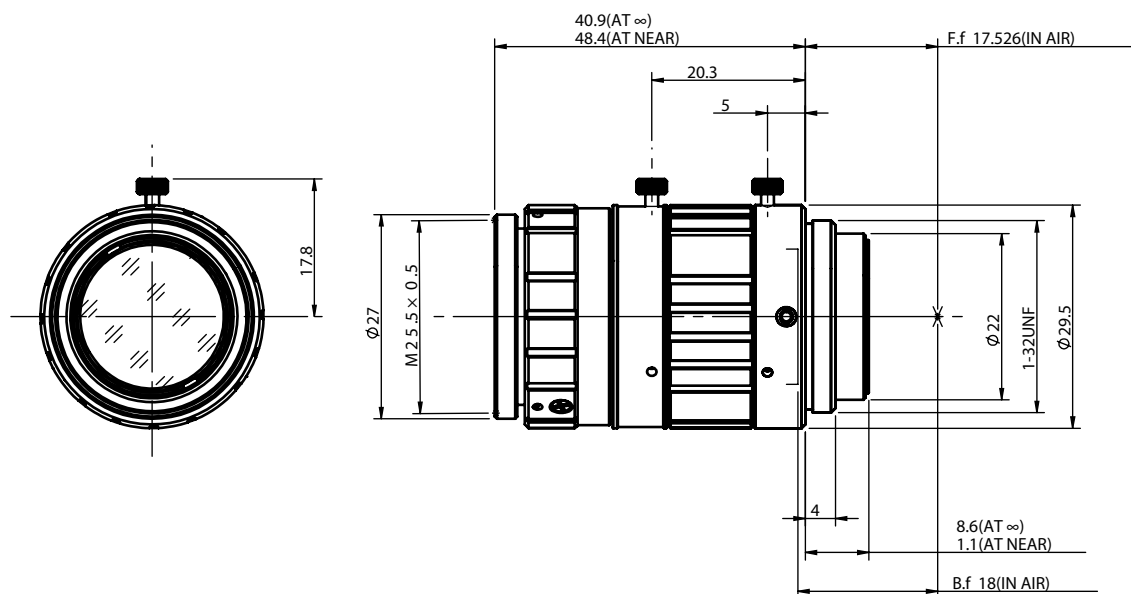

ver3.0E

型番	Product Name	HF35XA-5M
焦点距離[mm]	Focal length [mm]	35 (35.16)
絞り範囲(F no)	Iris range (F. no)	F1.9-F16
画角 (H x V)	Angle of view	14.2°×10.7° (2/3")
フォーカス範囲 (レンズメカ先端より) [mm]	Working distance (from front of lens barrel) [mm]	∞ -200
操作方法:フォーカス	Operation of focus	Manual
操作方法:アイリス	Operation of iris	Manual
フィルタ径 [mm]	Filter thread [mm]	M25.5 x 0.5
マウント	Mount	C-mount
質量(約) [g]	Weight (approx.) [g]	60
適合センサーサイズ(最大)	Sensor size (max.)	1/1.2"
バックフォーカス (空気換算長) [mm]	Back focal distance (in air) [mm]	18.50
フランジバック [mm]	Flange back [mm]	17.526
射出瞳位置 (結像面より) [mm]	Exit pupil position (from image plane) [mm]	-37.19
前側主点 (マウント面から)	Front principle point (from Mount)	-6.30
後側主点 (マウント面から)	Rear principle point (from Mount)	-17.63
二点間の距離 (主点間隔)	Distance between the principal points	-11.33
TVディストーション [%]	TV distortion [%]	0.10
外径寸法 [mm]	Dimension [mm]	$\phi 29.5 \times 41.5$
周辺光量(開放・隅)	Relative illumination (Aperture: at full open, Image height: at diagonal)	50
使用温度範囲	Operation Temperature	-10°C~50°C

These specifications are subject to change without notice.

01-Apr-17

Distributed by: **MaxxVision®**

Sigmaringer Str. 121
70567 Stuttgart
Tel.: 0711 997 996 3
www.maxxvision.com