

## MVL-HF5028M-6MPE 1/1.8" 50mm 6MP FA LENS


HF-E series FA Lens are optimized for machine vision light sources and sensor, with high resolution, excellent image quality, high transmittance and good stability. Featured with fixed focal length, manual aperture and compact size, it is suitable for machine vision industry applications and ideal for industrial cameras.




### Key Features

- Higher image clarity and contrast ratio
- Ultra-low distortion and higher relative illumination rate
- Good optical performance at ultra-short working distance
- Compact design, convenient for device integration


### Distortion

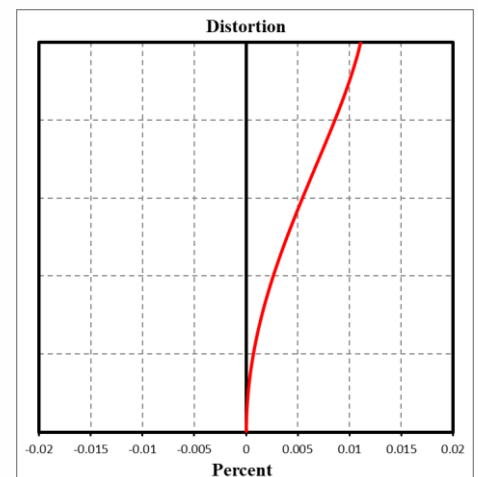

### MTF:

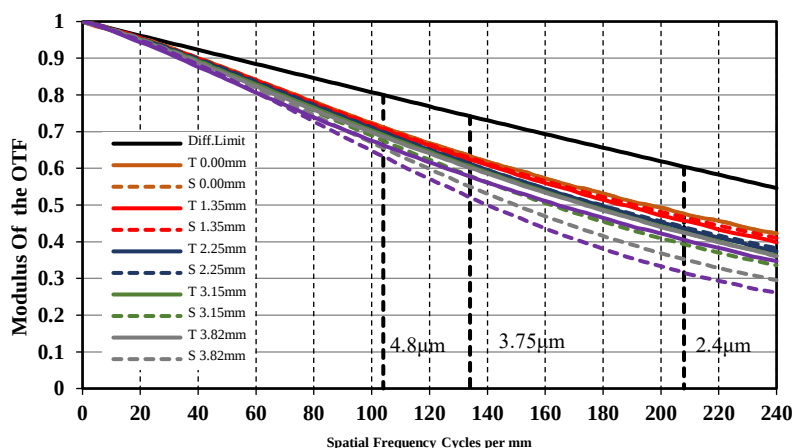

### Relative Illumination

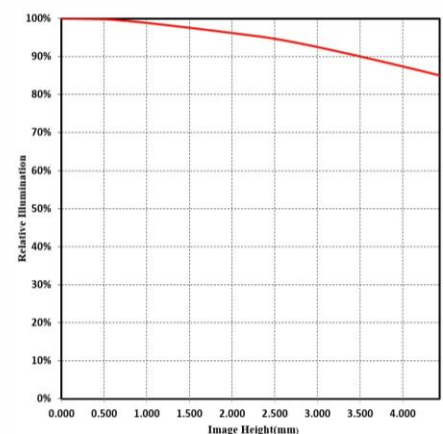


Note: The above curves are the simulate results based on F2.8,  $\beta = -0.105$ , WD=500 mm.



## Specification

| Parameter                  | Model                                                          | MVL-HF5028M-6MPE |
|----------------------------|----------------------------------------------------------------|------------------|
|                            | Fixed focal length, Manual iris, 6MP, FA Lens                  |                  |
| Performance                |                                                                |                  |
| Focal Length               | 50 mm                                                          |                  |
| F-Number                   | F2.8~F16                                                       |                  |
| Image Size                 | Φ9 mm(1/1.8")                                                  |                  |
| Distortion                 | 0.03%                                                          |                  |
| Minimum Operation Distance | 0.25 m                                                         |                  |
| Field of View              | D (8.96mm) : 9.72°<br>H (7.38mm) : 7.84°<br>V (4.92mm) : 5.24° |                  |
| Mechanical                 |                                                                |                  |
| Iris Control               | Manual                                                         |                  |
| Focus Control              | Manual                                                         |                  |
| Filter Thread              | M30.5 × 0.5                                                    |                  |
| Mount                      | C-Mount                                                        |                  |
| Flange Back Length         | 17.526 mm                                                      |                  |
| Dimension                  | Φ37 × 51.7 mm                                                  |                  |
| Weight                     | 102 g                                                          |                  |
| Temperature                | -10 ~ 50℃                                                      |                  |
| General                    |                                                                |                  |
| Certification              | RoHS2.0                                                        |                  |

## Dimension

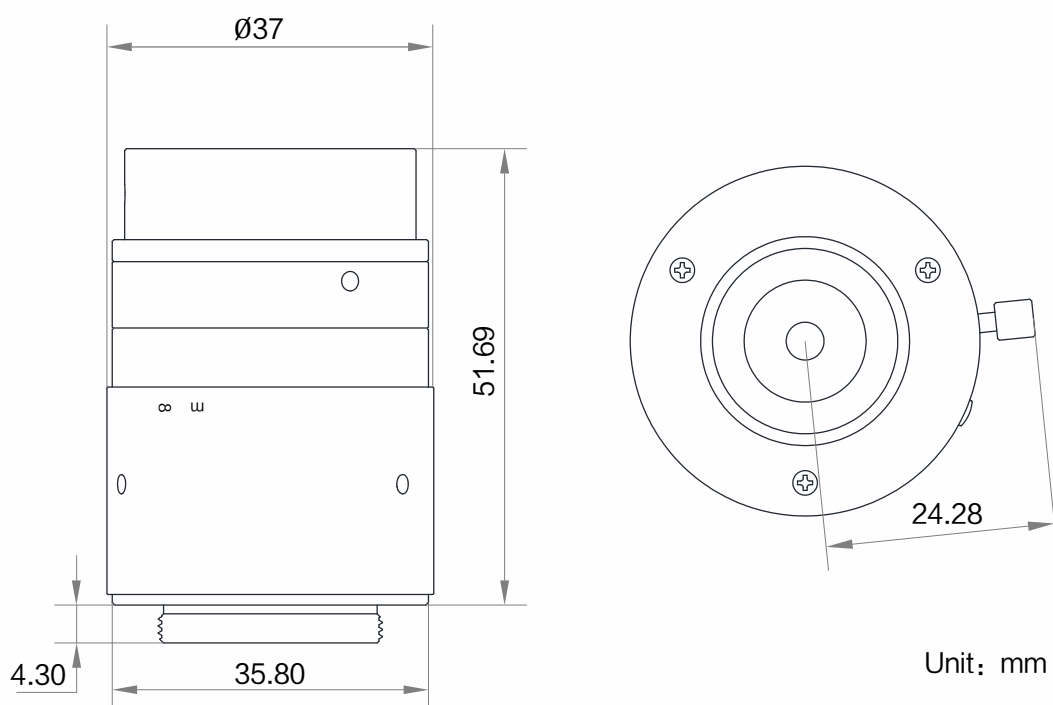

## Field of View

| Extension (mm) | Working Distance (mm) |       | Magnification | Field of View (mm) |           |           |           |
|----------------|-----------------------|-------|---------------|--------------------|-----------|-----------|-----------|
|                |                       |       |               | 1/1.8"             |           | 1/2"      |           |
|                |                       |       |               | H(7.38mm)          | H(4.92mm) | H(6.22mm) | V(4.67mm) |
| 20             | near                  | 108.6 | -0.645        | 11.47              | 7.64      | 9.67      | 7.25      |
|                | far                   | 146.7 | -0.427        | 17.33              | 11.54     | 14.60     | 10.95     |
| 10             | near                  | 144.4 | -0.433        | 17.08              | 11.38     | 14.39     | 10.80     |
|                | far                   | 247.9 | -0.231        | 31.94              | 21.28     | 26.91     | 20.20     |
| 5              | near                  | 179.9 | -0.327        | 22.63              | 15.08     | 19.07     | 14.31     |
|                | far                   | 410.9 | -0.133        | 55.44              | 36.96     | 46.73     | 35.08     |
| 2              | near                  | 215.1 | -0.263        | 28.12              | 18.74     | 23.69     | 17.78     |
|                | far                   | 717.1 | -0.074        | 99.55              | 66.39     | 83.92     | 63.02     |
| 1              | near                  | 231.0 | -0.242        | 30.60              | 20.39     | 25.78     | 19.35     |
|                | far                   | 967.3 | -0.054        | 135.59             | 90.43     | 114.30    | 85.84     |
| 0              | 250                   |       | -0.220        | 33.56              | 22.37     | 28.28     | 21.23     |
|                | 300                   |       | -0.180        | 40.98              | 27.31     | 34.53     | 25.92     |
|                | 350                   |       | -0.153        | 48.31              | 32.20     | 40.71     | 30.56     |
|                | 400                   |       | -0.133        | 55.57              | 37.04     | 46.83     | 35.16     |
|                | 450                   |       | -0.118        | 62.80              | 41.86     | 52.93     | 39.74     |
|                | 500                   |       | -0.105        | 70.00              | 46.67     | 59.00     | 44.30     |
|                | 550                   |       | -0.096        | 77.18              | 51.46     | 65.05     | 48.84     |
|                | 600                   |       | -0.087        | 84.34              | 56.23     | 71.09     | 53.38     |
|                | 650                   |       | -0.081        | 91.49              | 61.01     | 77.12     | 57.91     |
|                | 700                   |       | -0.075        | 98.63              | 65.77     | 83.14     | 62.43     |
|                | 800                   |       | -0.065        | 112.88             | 75.28     | 95.16     | 71.46     |
|                | 900                   |       | -0.058        | 127.12             | 84.78     | 107.16    | 80.47     |
|                | 1000                  |       | -0.052        | 141.34             | 94.27     | 119.15    | 89.48     |

**MaxxVision®**

Sigmaringer Str. 121

70567 Stuttgart

Tel.: 0711 997 996 3

[www.maxxvision.com](http://www.maxxvision.com)

**HIKROBOT**

Hangzhou Hikrobot Co., Ltd.  
[en.hikrobotics.com](http://en.hikrobotics.com)

© Hangzhou Hikrobot Co., Ltd. All Rights Reserved.

Hangzhou Hikrobot does not tolerate any infringement. Any organization or individual may not imitate or reproduce in whole or in part of the content. The data herein is based on Hikrobot's internal evaluation. Actual data may vary depending on specific configuration and operating condition. The information herein is subject to change without notice. All the content has been checked conscientiously. Nevertheless, Hikrobot shall not be liable to damages resulting from errors, inconsistencies or omissions.