

MVL-KF2528M-12MP

1.1" 25mm 12MP FA LENS

FA series Lens are optimized for machine vision light sources and sensors, with high resolution, excellent image uniformity, high transmittance and good stability. Featured with fixed focal length, manual aperture and compact size, it is suitable for machine vision industry applications.



Key Features

- High resolution, high definition of the whole image
- Low distortion, high illumination relative
- Excellent mechanism design, improve the shock resistance and high/low temperature stability
- Multilayer wide band coating, ensuring high transmittance of visible and near infrared light
- Support ultra short working distance, maintaining excellent optical properties at different object distances

Order Model

MVL-KF2528M-12MP

Specification


Model		MVL-KF2528M-12MP		
Parameter		Fixed focal length, Manual iris, 12MP, FA Lens		
Focal Length		25mm	Mount	C-Mount
F-Number		F2.8~F16	Flange Back Length	17.526mm
Image Size		Φ17.6mm(1.1")	Filter Thread	M35.5*0.5
Optical Distortion		0.40%	Minimum Operation Distance	0.15m
Control	Iris	Manual	Dimension	Φ38.6×44.01mm
	Focus	Manual		
Operating Temperature		-10~50°C	Weight	133g
Angle of View		1.1"	D (17.6mm)	36.7°
			H (14.08mm)	29.6°
			V (10.56mm)	22.1°




Field of View

Working Distance (mm)	Magnification	Extension (mm)	Field of View (mm)					
			1.1"		1"		2/3"	
			(14.14mm×10.35mm)		(12.45mm×9.83mm)		(8.45mm×7.07mm)	
			H	V	H	V	H	V
25	-0.632	12	22.72	16.53	19.95	15.69	13.46	11.24
50	-0.386	6	37.20	27.08	32.68	25.70	22.06	18.43
75	-0.277	3	51.74	37.68	45.45	35.76	30.69	25.64
100	-0.217	2	66.02	48.12	58.03	45.67	39.20	32.76
150	-0.151		95.03	69.28	83.53	65.76	56.45	47.17
200	-0.116		123.26	89.96	108.41	85.40	73.33	61.28
250	-0.094		151.48	110.63	133.27	105.03	90.20	75.40
300	-0.079		179.68	131.30	158.13	124.66	107.07	89.51
350	-0.068		207.88	151.97	182.98	144.29	123.94	103.62
400	-0.060		236.07	172.63	207.83	163.91	140.80	117.73
450	-0.054		264.26	193.30	232.68	183.54	157.67	131.84
500	-0.049		292.45	213.96	257.52	203.16	174.54	145.94
550	-0.044		320.64	234.62	282.37	222.78	191.40	160.05
600	-0.041		348.82	255.28	307.21	242.41	208.27	174.16
650	-0.038		377.01	275.94	332.05	262.03	225.14	188.27
700	-0.035		405.19	296.60	356.89	281.65	242.00	202.38
750	-0.033		433.37	317.26	381.74	301.27	258.87	216.49
800	-0.031		461.55	337.92	406.58	320.89	275.73	230.60
850	-0.029		489.73	358.58	431.42	340.51	292.60	244.70
900	-0.027		517.92	379.24	456.26	360.14	309.46	258.81
950	-0.026		546.10	399.90	481.10	379.76	326.33	272.92
1000	-0.025		574.28	420.56	505.94	399.38	343.19	287.03


Dimension

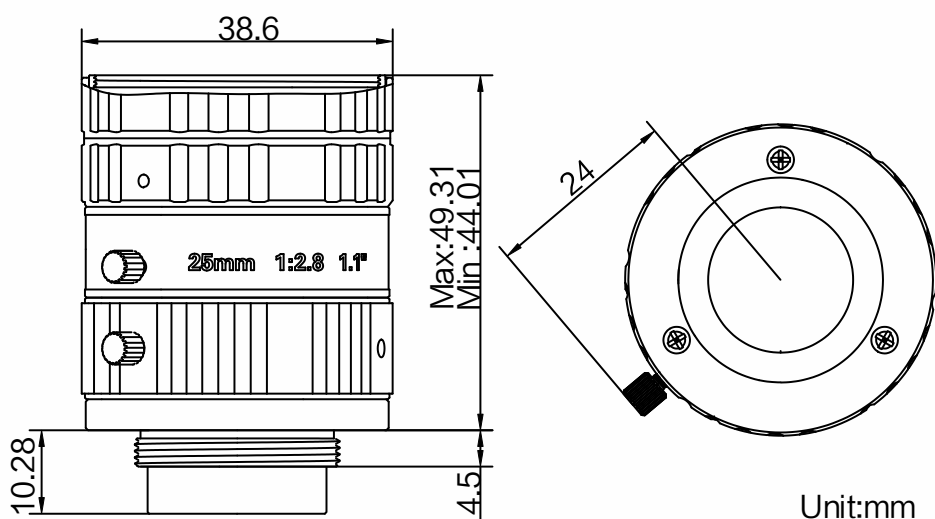


MTF

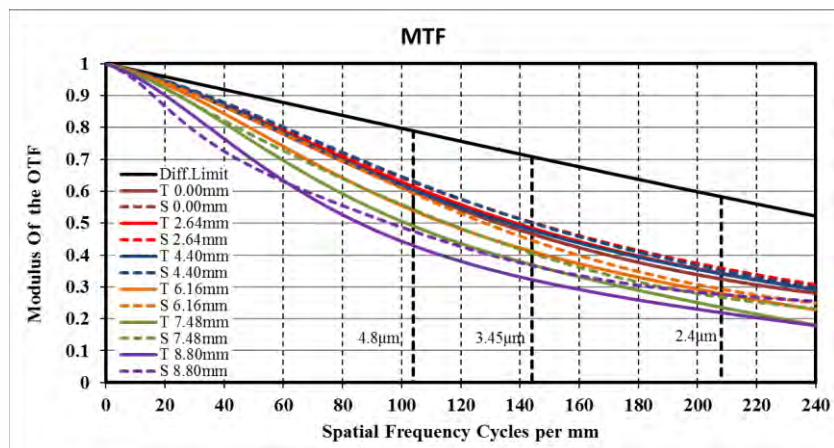


Distortion

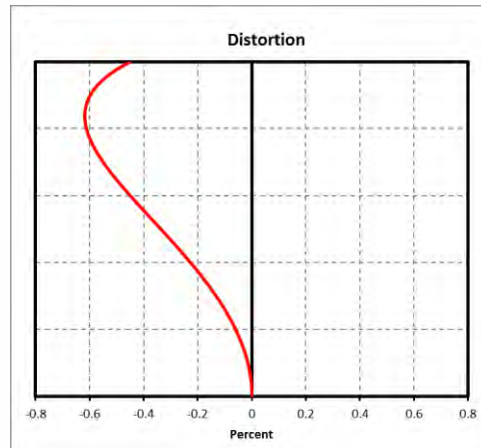

Transmission

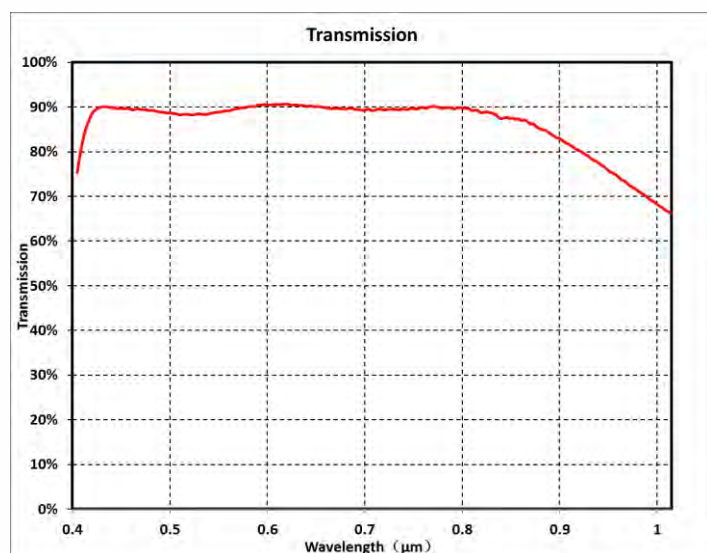

Relative Illumination

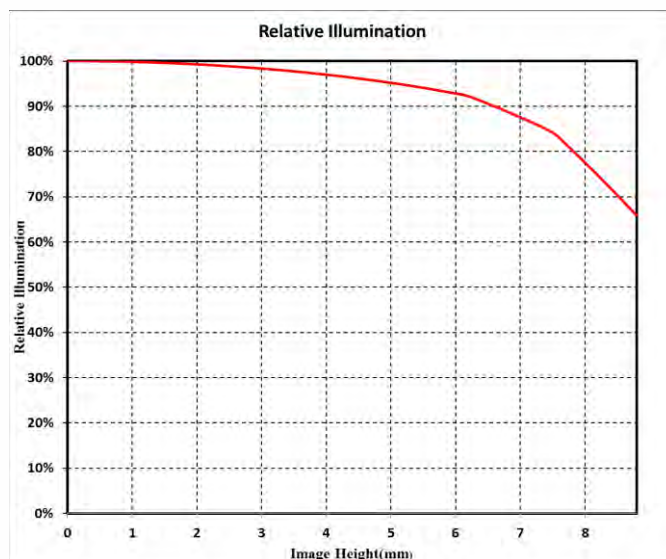

Note: The above curves are the simulate results based on F2.8, $\beta=-0.079$, WD=300 mm.

MaxxVision®

Sigmaringer Str. 121

70567 Stuttgart

Tel.: 0711 997 996 3

www.maxxvision.com

HIKROBOT

Hangzhou Hikrobot Technology Co., Ltd.

No.399 Danfeng Road, Binjiang District, Hangzhou 310051, China.

en.hikrobotics.com

Copyright Hikrobot

Hangzhou Hikrobot Technology Co., Ltd. All Rights Reserved. Hangzhou Hikrobot Technology does not tolerate any infringement. Any organization or individual may not imitate or reproduce in whole or in part of the content. The data herein is based on Hikrobot's internal evaluation. Actual data may vary depending on specific configuration and operating condition. The information herein is subject to change without notice. All the content has been checked conscientiously. Nevertheless, Hikrobot shall not be liable to damages resulting from errors, inconsistencies or omissions.