



Dome Light

Direct Dome Light

IDD series

Strong illumination from all directions

24V DC Models Available

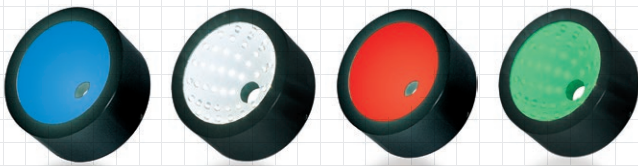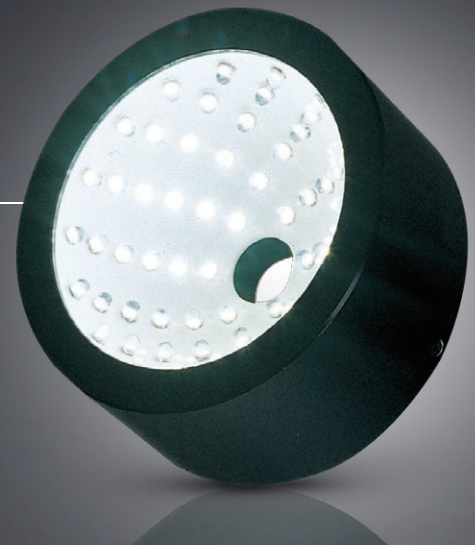

Model	Light Color	Power Consumption (W)	Input Voltage	SAG (*)	Power Supply	Drawing
IDD-60/13□	R	2.7	DC12V	6F	ILP-30M2 (P.85) IDGB series (P.81) other, overdrive power supply, etc.	1
	DW B G	4		FF		
IDD-60/13□S(30%)	R	2.7		6F		2
	DW B G	4		FF		
IDD-120/30□	R	12.5		76		3
	DW B G	18.8		FF		
IDD-120/30□S(30%)	R	12.5		76		4
	DW B G	18.8		FF		

□ represents light color (R=Red, DW=White, B=Blue, G=Green)
 * A diffusing dome (transmissivity of 30%, 60%, or 80%) can be mounted.
 * Input voltage is 12 V DC, but 24 V DC models are also available.
 * See page 74 for 24 V DC models.
 * Sizes other than those above are also available.
 * The SAG value indicates the maximum voltage setting for SAG power supplies. For details, see page 91.

Option (diffusing dome can be mounted)

