

MV-CH250-90TM/TC

25 MP 1.1" CMOS 10 GigE Area Scan Camera



GEN*i*CAM

10GigE
VISION

Introduction

MV-CH250-90TM/TC camera adopts Gpixel GMAX0505 sensor to provide high-quality image. It uses 10 GigE interface to transmit non-compressed image in real time, and its max. frame rate can reach 41.5 fps in full resolution.

Key Feature

- Resolution of 5120 × 5120, pixel size of 2.5 μm × 2.5 μm.
- Adopts 10 GigE interface providing maximum transmission distance of 100 meters.
- Supports adjustment for exposure time, gain, Look-Up Table (LUT), Gamma correction, etc.
- Mounting holes on panels for flexible installation.
- Compatible with GigE Vision Protocol V2.0, GenICam Standard, and third-party software based on protocols.


Available Model

- Mono M58-mount with fan: MV-CH250-90TM-M58S-NF
- Color M58-mount with fan: MV-CH250-90TC-M58S-NF
- Color C-mount with fan: MV-CH250-90TC-C-NF

Applicable Industry

SMT/PCB AOI, FPD, railway related applications, photovoltaic industry, etc.

Sensor Quantum Efficiency

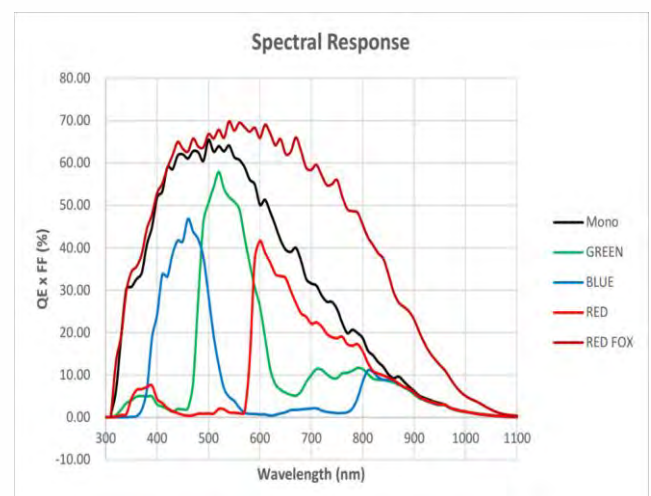


Specification


Model	MV-CH250-90TM	MV-CH250-90TC
Camera		
Sensor type	CMOS, global shutter	
Sensor model	Gpixel GMAX0505	
Pixel size	2.5 μm \times 2.5 μm	
Sensor size	1.1"	
Resolution	5120 \times 5120	
Max. frame rate	41.5 fps @5120 \times 5120	
Dynamic range	63 dB	
SNR	36 dB	
Gain	2.0x to 5.0x	
Exposure time	13 μs to 10 sec	
Exposure mode	Off/Once/Continuous exposure mode	
Mono/color	Mono	Color
Pixel format	Mono 8/10/10p/12/12p	Mono 8/10/12, Bayer BG 8/10/10p/12/12p, YUV422Packed, YUV422_YUYV_Packed, RGB 8, BGR 8
Binning	Supports 1 \times 1, 1 \times 2, 1 \times 4, 2 \times 1, 2 \times 2, 2 \times 4, 4 \times 1, 4 \times 2, 4 \times 4	
Decimation	Supports 1 \times 1, 1 \times 2, 1 \times 4, 2 \times 1, 2 \times 2, 2 \times 4, 4 \times 1, 4 \times 2, 4 \times 4	
Reverse image	Supports horizontal and vertical reverse image output	
Electrical feature		
Data interface	10 Gigabit Ethernet, compatible with Gigabit Ethernet	
Digital I/O	12-pin Hirose connector provides power and I/O, including opto-isolated input \times 1 (Line 0), opto-isolated output \times 1 (Line 1), bi-directional non-isolated I/O \times 1 (Line 2), and RS-232 \times 1	
Power supply	9 VDC to 24 VDC	
Power consumption	Typ. 9.7 W@12 VDC	Typ. 10.0 W@12 VDC
Mechanical		
Lens mount	C-mount, optical back focal length 17.52 mm (0.7") M58-mount, optical back focal length 11.48 mm (0.5")	
Dimension	74 mm \times 74 mm \times 78.8 mm (2.9" \times 2.9" \times 3.1")	
Weight	C-mount camera: approx. 590 g (1.3 lb.) M58-mount camera: approx. 550 g (1.2 lb.)	
Ingress protection	IP40 (under proper lens installation and wiring)	
Temperature	Working temperature: 0 $^{\circ}\text{C}$ to 50 $^{\circ}\text{C}$ (32 $^{\circ}\text{F}$ to 122 $^{\circ}\text{F}$) Storage temperature: -30 $^{\circ}\text{C}$ to 70 $^{\circ}\text{C}$ (-22 $^{\circ}\text{F}$ to 158 $^{\circ}\text{F}$)	
Humidity	20% to 95% RH, non-condensing	
General		
Client software	MVS or third-party software meeting with GigE Vision Protocol	
Operating system	32/64-bit Windows XP/7/10	
Compatibility	GigE Vision V2.0, GenICam	
Certification	CE, FCC, RoHS, KC	

Dimension

C-mount camera:

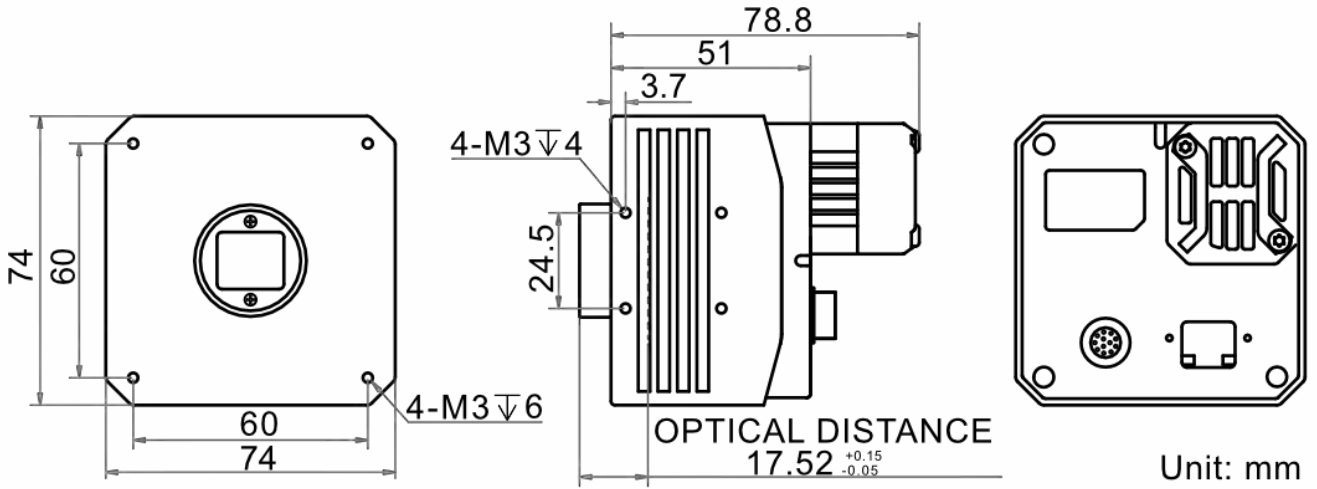

M58-mount camera:

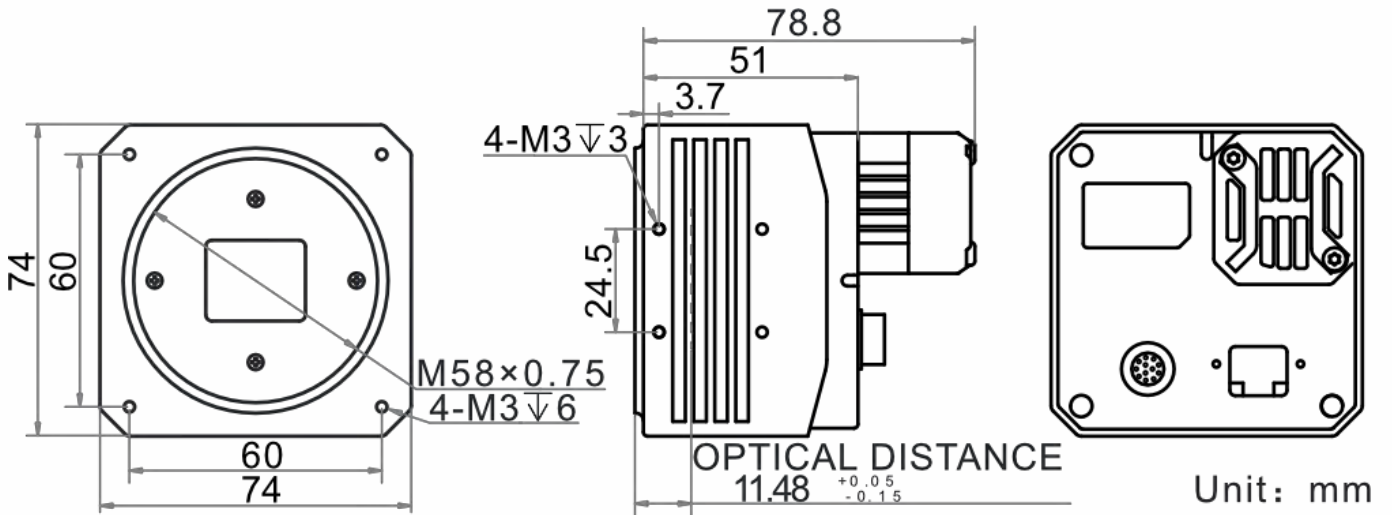

HIKROBOT

Hangzhou Hikrobot Technology Co., Ltd.
No.399 Danfeng Road, Binjiang District, Hangzhou 310051, China.
en.hikrobotics.com

MaxxVision®

Sigmaringer Str. 121
70567 Stuttgart
Tel.: 0711 997 996 3
www.maxxvision.com

Copyright Hikrobot

Hangzhou Hikrobot Technology Co., Ltd. All Rights Reserved. Hangzhou Hikrobot Technology does not tolerate any infringement. Any organization or individual may not imitate or reproduce in whole or in part of the content. The data herein is based on Hikrobot's internal evaluation. Actual data may vary depending on specific configuration and operating condition. The information herein is subject to change without notice. All the content has been checked conscientiously. Nevertheless, Hikrobot shall not be liable to damages resulting from errors, inconsistencies or omissions.