

# MV-CH650-90XM/XC

## 65 MP CMOS CoaXPress Area Scan Camera



GEN*i*CAM

CoaXPress®

### Introduction

MV-CH650-90XM/XC camera adopts Gpixel GMAX3265 sensor and CXP-6 interface to provide high-quality and non-compressed images in real time. Its max. frame rate reaches up to 31.5 fps in full resolution.

### Key Feature

- Resolution of 9344 × 7000, and pixel size of 3.2 μm × 3.2 μm.
- Adopts global shutter CMOS to provide high dynamic range, SNR, and high-quality image.
- Adopts CXP-6 interface to transmit data.
- Supports Off, Once, and Continuous exposure mode.
- Compatible with CoaXPress Protocol, GeniCam Standard, and third-party software based on the protocol and standard.


### Available Model

- M58-mount with fan, mono: MV-CH650-90XM-M58S-NF
- F-mount with fan, mono: MV-CH650-90XM-F-NF
- M58-mount with fan, color: MV-CH650-90XC-M58S-NF
- F-mount with fan, color: MV-CH650-90XC-F-NF

### Applicable Industry


PCB AOI, FPD, high-accuracy measurement, etc.

### Sensor Quantum Efficiency

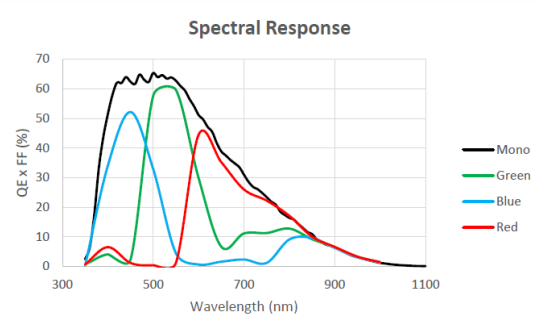


### Dimension

F-mount with fan:

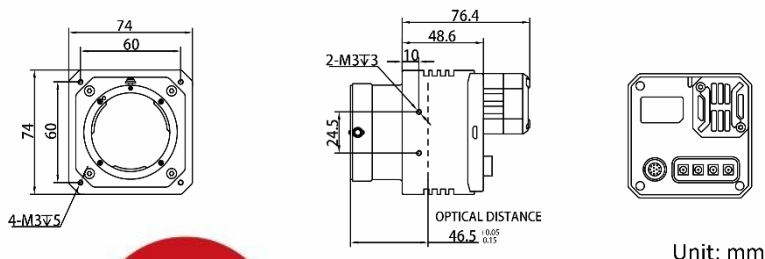

M58-mount with fan:

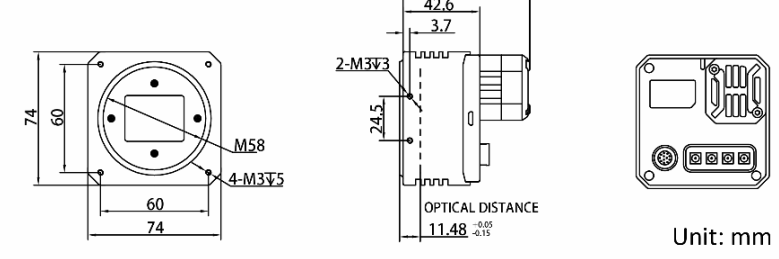

# Specification

Model	MV-CH650-90XM	MV-CH650-90XC
<b>Camera</b>		
Sensor type	CMOS, global shutter	
Sensor model	Gpixel GMAX3265	
Pixel size	3.2 $\mu\text{m}$ $\times$ 3.2 $\mu\text{m}$	
Sensor size	29.9 mm $\times$ 22.4 mm	
Resolution	9344 $\times$ 7000	
Max. frame rate	31.5 fps @9344 $\times$ 7000	
Dynamic range	66 dB	
SNR	40 dB	
Gain	1.25x to 6x	
Exposure time	14 $\mu\text{s}$ to 10 sec	
Exposure mode	Off/Once/Continuous exposure mode	
Mono/color	Mono	Color
Pixel format	Mono 8/10/12	Bayer BG 8/10/12
Binning	Supports 1 $\times$ 1, 1 $\times$ 2, 1 $\times$ 4, 2 $\times$ 1, 2 $\times$ 2, 2 $\times$ 4, 4 $\times$ 1, 4 $\times$ 2, 4 $\times$ 4	
Decimation	Supports 1 $\times$ 1, 1 $\times$ 2, 1 $\times$ 4, 2 $\times$ 1, 2 $\times$ 2, 2 $\times$ 4, 4 $\times$ 1, 4 $\times$ 2, 4 $\times$ 4	
Reverse image	Supports horizontal and vertical reverse image output	
<b>Electrical features</b>		
Data interface	CoaXPress with DIN interface	
Digital I/O	12-pin Hirose connector provides I/O: opto-isolated input $\times$ 1 (Line 0), opto-isolated output $\times$ 1 (Line 1), bi-directional non-isolated I/O $\times$ 1 (Line 2), and RS-232 $\times$ 1.	
Power supply	9 VDC to 24 VDC	
Power consumption	Typ. 13.4 W@12 VDC	Typ. 14.2 W@12 VDC
<b>Mechanical</b>		
Lens mount	M58-mount: optical back focal length: 11.48 mm (0.5") F-mount: optical back focal length: 46.5 mm (1.8")	
Dimension	M58-mount with fan: 74 mm $\times$ 74 mm $\times$ 70.4 mm (2.9" $\times$ 2.9" $\times$ 2.8") F-mount with fan: 74 mm $\times$ 74 mm $\times$ 76.4 mm (2.9" $\times$ 2.9" $\times$ 3.0")	
Weight	M58-mount with fan: approx. 470 g (1.0 lb.) F-mount with fan: approx. 500 g (1.1 lb.)	
Ingress protection	IP40 (under proper lens installation and wiring)	
Temperature	Working temperature: 0 $^{\circ}\text{C}$ to 50 $^{\circ}\text{C}$ (32 $^{\circ}\text{F}$ to 122 $^{\circ}\text{F}$ ) Storage temperature: -30 $^{\circ}\text{C}$ to 70 $^{\circ}\text{C}$ (-22 $^{\circ}\text{F}$ to 158 $^{\circ}\text{F}$ )	
Humidity	20% to 95% RH, non-condensing	
<b>General</b>		
Client software	Frame grabber software meeting with CoaXPress Protocol	
Operating system	32/64-bit Windows 7/10 with 8 GB memory or above	
Compatibility	CoaXPress, GenICam	
Certifications	CE, FCC, RoHS, KC	

**MaxxVision®**

Sigmaringer Str. 121  
70567 Stuttgart  
Tel.: 0711 997 996 3  
[www.maxxvision.com](http://www.maxxvision.com)

**HIKROBOT**

Hangzhou Hikrobot Technology Co., Ltd.  
No.399 Danfeng Road, Binjiang District, Hangzhou 310051, China.  
[en.hikrobotics.com](http://en.hikrobotics.com)

Copyright Hikrobot

Hangzhou Hikrobot Technology Co., Ltd. All Rights Reserved. Hangzhou Hikrobot Technology does not tolerate any infringement. Any organization or individual may not imitate or reproduce in whole or in part of the content. The data herein is based on Hikrobot's internal evaluation. Actual data may vary depending on specific configuration and operating condition. The information herein is subject to change without notice. All the content has been checked conscientiously. Nevertheless, Hikrobot shall not be liable to damages resulting from errors, inconsistencies or omissions.