

MV-CA050-20GN

5 MP 1" CMOS Near-Infrared GigE Camera



GEN*i*CAM

GIG*E*
VISION

Introduction

MV-CA050-20GN camera is a high quality device that can be used in a variety of applications, including electronic semiconductor fabrication, factory automation, quality inspection, etc.

Key Feature

- Adopts GigE interface and max. transmission distance of 100 meters without relay
- Up to 128 MB local memory for burst transmission and retransmission
- Supports auto exposure control, LUT, Gamma correction, etc.
- Supports hardware trigger, software trigger, etc.
- Compatible with GigE Vision V1.2 Protocol and the third-party software based on the protocol


Available Model

Near-Infrared : MV-CA050-20GN


Applicable Industry

Electronic semiconductor, factory automation, quality inspection, etc.

Sensor Quantum Efficiency

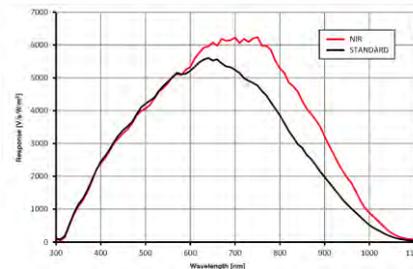

Dimension

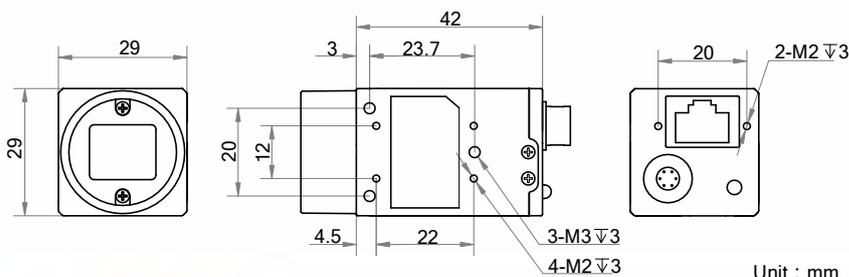

Specification

Model	MV-CA050-20GN
Camera	
Sensor type	CMOS, global shutter
Sensor model	PYTHON5000
Pixel size	4.8 μm × 4.8 μm
Sensor size	1"
Resolution	2592 × 2048
Max. frame rate	22 fps @2592 × 2048
Dynamic range	57.5 dB
SNR	39.5 dB
Gain	0 dB to 15 dB
Exposure time	65 μs to 10 s
Shutter mode	Off/Once/Continuous exposure mode
Pixel format	Mono 8/10/10p/12/12p
Reverse image	Supports horizontal and vertical reverse image output
Image buffer	128 MB
Electrical features	
Data interface	Gigabit Ethernet
Digital I/O	Opto-isolated input x 1, opto-isolated output x 1, and bi-directional non-isolated I/O x 1
Power supply	5 VDC to 15 VDC, supports PoE power supply
Power consumption	Approx. 3.3 W@12 VDC
Structure	
Lens mount	C-Mount
Dimension	29 mm × 29 mm × 42 mm (1.1" × 1.1" × 1.7")
Weight	Approx. 68 g (0.15 lb.)
Ingress protection	IP30 (under proper lens installation and wiring)
Temperature	Working temperature: 0 °C to 50 °C (32 °F to 122 °F) Storage temperature: -30 °C to 70 °C (-22 °F to 158 °F)
Humidity	20% to 80% RH, without condensation
General	
Client software	MVS or third-party software meeting with GigE Vision Protocol
Operating system	32/64-bit Windows XP/7/10, 32/64-bit Linux and 64-bit MacOS
Compatibility	GigE Vision
Certification	CE, FCC, RoHS, KC

HIKROBOT

Hangzhou Hikrobot Technology Co., Ltd.
No.399 Danfeng Road, Binjiang District, Hangzhou 310051, China.
en.hikrobotics.com

MaxxVision®

Sigmaringer Str. 121
70567 Stuttgart
Tel.: 0711 997 996 3
www.maxxvision.com

Copyright Hikrobot

Hangzhou Hikrobot Technology Co., Ltd. All Rights Reserved. Hangzhou Hikrobot Technology does not tolerate any infringement. Any organization or individual may not imitate or reproduce in whole or in part of the content. The data herein is based on Hikrobot's internal evaluation. Actual data may vary depending on specific configuration and operating condition. The information herein is subject to change without notice. All the content has been checked conscientiously. Nevertheless, Hikrobot shall not be liable to damages resulting from errors, inconsistencies or omissions.