

MV-ID3004M

0.4 MP Smart Code Reader



Introduction

MV-ID3004M smart code reader adopts Hikrobot's deep learning algorithm and can recognize and read different types of barcodes. It has good robustness and its max. frame rate reaches 60 fps.

Key Feature

- Adopts CMOS sensor to acquire image data and provide high-quality image.
- Adopts built-in deep learning algorithm to read barcodes.
- Adopts multiple IO interfaces for input and output signals.
- Adopts OK/NG, PWR, STS and LNK indicators for displaying different statuses.
- Supports multiple communication protocols, including TCP, Serial, FTP, Profinet, etc.


Available Model

6 mm focal length: MV-ID3004M-06S-WBN
 12.4 mm focal length: MV-ID3004M-12S-WBN
 14.8 mm focal length: MV-ID3004M-15S-WBN

Applicable Industry

Consumer electronics, food and beverage, pharmaceutical, semiconductor, automobile, etc.

Dimension

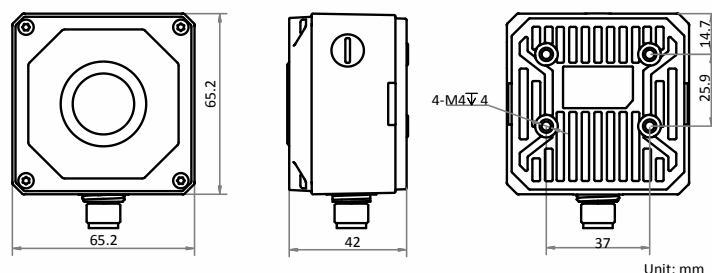

Unit: mm



Specification

Model	MV-ID3004M-06S-WBN	MV-ID3004M-12S-WBN	MV-ID3004M-15S-WBN
Performance			
Symbolologies	1-dimensional codes: Code 128, Code 39 2-dimensional codes: QR, DM		
Max. frame rate	60 fps @704 × 512		
Max. reading speed	60 codes/s		
Sensor type	CMOS, global shutter		
Pixel size	6.9 μm x 6.9 μm		
Sensor size	1/2.9"		
Resolution	704 × 512		
Exposure time	16 μs to 1 s		
Gain	0 dB to 40 dB		
Mono/color	Mono		
Communication protocol	SmartSDK, TCP Client, TCP Server, Serial, FTP, Profinet		
Electrical features			
Interface	17-pin M12 interface provides power, Ethernet, digital IO, and serial port		
Ethernet	Fast Ethernet		
Digital IO	Non-isolated input x 3 (LineIn 0/1/2), non-isolated output x 3 (LineOut 0/1/2), RS-232 x 1. Device trigger via pressing button on top supported.		
Power supply	12 VDC to 24 VDC		
Power consumption	< 19.8 W@24 VDC		
Structure			
Lens focal length	6 mm (0.2")	12.4 mm (0.5")	14.8 mm (0.6")
Lens mount	M12-mount, manual focus supported		
Lens cap	Transparent lens cap. Polarization lens cap is optional		
Light source	Spotlight white light. Spotlight red or blue, wide-angle white or blue light is optional		
Indicator	Power indicator (PWR), network indicator (LNK), status indicator (STS), result indicator (OK/NG)		
Dimension	65.2 mm x 65.2 mm x 42 mm (2.6" x 2.6" x 1.7")		
Weight	Approx. 240 g (0.5 lb.)		
Ingress protection	IP67 (under proper installation of waterproof lens cap)		
Temperature	Working temperature: 0 °C to 50 °C (32 °F to 122 °F) Storage temperature: -30 °C to 70 °C (-22 °F to 158 °F)		
Humidity	20% to 95% RH, without condensation		
General			
Client software	IDMVS		

HIKROBOT

Hangzhou Hikrobot Technology Co., Ltd.
No.399 Danfeng Road, Binjiang District, Hangzhou 310051, China.
en.hikrobotics.com

MaxxVision®
Sigmaringer Str. 121
70567 Stuttgart
Tel.: 0711 997 996 3
www.maxxvision.com

Copyright Hikrobot

Hangzhou Hikrobot Technology Co., Ltd. All Rights Reserved. Hangzhou Hikrobot Technology does not tolerate any infringement. Any organization or individual may not imitate or reproduce in whole or in part of the content. The data herein is based on Hikrobot's internal evaluation. Actual data may vary depending on specific configuration and operating condition. The information herein is subject to change without notice. All the content has been checked conscientiously. Nevertheless, Hikrobot shall not be liable to damages resulting from errors, inconsistencies or omissions.