

MV-ID7080EM-35F-WHA

ID7000 Series Logistics Code Reader



Introduction

MV-ID7080EM-35F-WHA logistics code reader realizes automatic code recognition in all directions based on DWS code reading scenario. Relying on code recognition technology, the code reader can output recognition results in a rapid and accurate way.

Key Feature

- Built-in code reading algorithm to read different types of one-dimensional and two-dimensional codes with good robustness.
- Supports image stitching and outputting combined images according to order.
- Adopts image sensor to acquire and provide high-quality images.
- Supports different trigger modes and image acquisition modes.
- Adopts multiple IO interfaces for input/output signals.
- Supports RS-232 serial communication protocol.
- Integrated light source design with 36 LED lamps.


Available Model

MV-ID7080EM-35F-WHA

Applicable Industry

Code reading in logistics industry, factory automation, etc.

Dimension

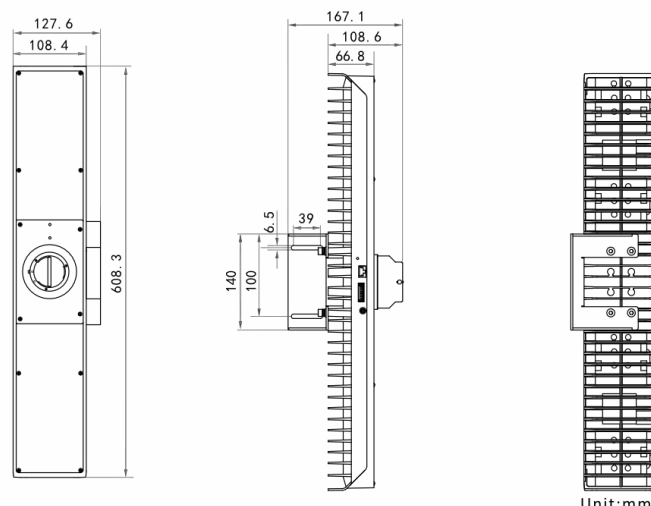

Unit:mm



Specification

Model	MV-ID7080EM-35F-WHA
Performance	
Symbologies	1-dimensional codes: Code 39, Code 93, Code 128, CodaBar, EAN 8, EAN 13, ITF 14, ITF 25, UPCA, and UPCE 2-dimensional codes: QR Code, Data Matrix
Max. line frequency	15 kHz
Max. operating speed of conveyer belt	2.5 m/sec
Resolution	7424 × 1
Focal length	35 mm (1.4")
Best working distance	1000 mm (39.4")
Field of view (range)	1000 mm @10 mil
Mono/color	Mono
Communication protocol	SmartSDK, TCP Client, Serial, FTP, TCP Server
Electrical feature	
Data interface	Gigabit Ethernet
Digital I/O	10-pin green terminal provides I/O, including differential input (LineIn 0) × 1, opto-isolated input (LineIn 1) × 1, opto-isolated output (LineOut 3/4) × 2, and RS-232 × 1.
Power supply	48 VDC
Max. power consumption	180 W@48 VDC
Mechanical	
Lens mount	F-mount, flange back focal length 46.5 mm (1.8")
Dimension	608.3 mm × 127.6 mm × 167.1 mm (23.9" × 5.0" × 6.6")
Weight	Approx. 5 kg (11.0 lb.)
Temperature	Working temperature: 0 °C to 50 °C (32 °F to 122 °F) Storage temperature: -30 °C to 70 °C (-22 °F to 158 °F)
Humidity	20% to 95% RH, non-condensing
General	
Client software	IDMVS
Operating system	32/64-bit Windows XP/7/10
Certification	CE, RoHS, KC

Distributed by:

MaxxVision®

Sigmaringer Str. 121
70567 Stuttgart
Tel: +711 997 996 3
maxxvision.com

HIKROBOT

Hangzhou Hikrobot Co., Ltd.
en.hikrobotics.com

© Hangzhou Hikrobot Co., Ltd. All Rights Reserved.

Hangzhou Hikrobot does not tolerate any infringement. Any organization or individual may not imitate or reproduce in whole or in part of the content. The data herein is based on Hikrobot's internal evaluation. Actual data may vary depending on specific configuration and operating condition. The information herein is subject to change without notice. All the content has been checked conscientiously. Nevertheless, Hikrobot shall not be liable to damages resulting from errors, inconsistencies or omissions.