

MV-SC3050M

5 MP 1/1.7" Vision Sensor



Introduction

With built-in positioning and measurement algorithms, MV-SC3050M vision sensor can detect object's existence, quantity, location, etc. It can be monitored and operated via the SCMVS client. It can output results via RS-232 and Ethernet, and cooperate with other processes via IO. The vision sensor supports multiple result output methods and customized result text output.

Key Features

- Adopts embedded hardware platform for high-speed image processing.
- Adopts built-in positioning and measurement algorithms to object's existence, quantity, location, etc.
- Multiple IO interfaces for input and output signals.
- Multiple indicators for displaying device status.
- Adopts light source to ensure uniform brightness in the illuminated area.
- Supports multiple communication protocols, including Serial Port, TCP, UDP, FTP, Profinet, Modbus, etc.


Available Model

- 8 mm focal length: MV-SC3050M-08M-WBN
- 12.4 mm focal length: MV-SC3050M-12M-WBN
- 16 mm focal length: MV-SC3050M-16M-WBN

Applicable Industry

Consumer electronics, food and medical industry, automobile, etc.

Dimension

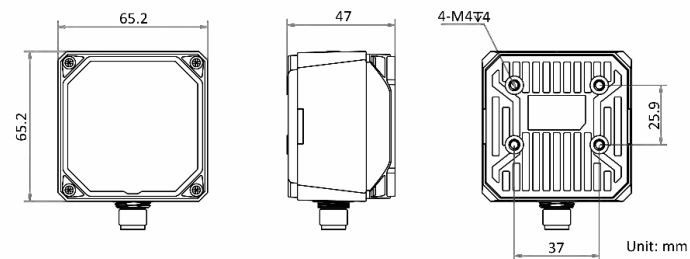

Specification


Model	MV-SC3050M-08M-WBN	MV-SC3050M-12M-WBN	MV-SC3050M-16M-WBN
Tool			
Vision tool	<ul style="list-style-type: none"> ● Count: Pattern count, spot count, edge count ● Defect detection: Exception detection ● Existence: Pattern existence, spot existence, edge existence, circle existence, line existence ● Location: Match location, match calibration ● Logic tool: If module, condition judge, logic judge, combination judge, character comparison, calculator ● Measurement: L2L angle, diameter measurement, brightness average value, contrast measurement, width measurement, P2L measurement, greyscale size, line angle, edge width measurement ● Recognition: OCR, code recognition 		
Solution capacity	Supports solution importing and exporting, up to 32 solutions and 40 modules can be stored.		
Communication protocol	Serial Port, TCP, UDP, FTP, Profinet, Modbus, Ethernet/IP		
Camera			
Sensor type	CMOS, global shutter		
Pixel size	3.2 μm × 3.2 μm		
Sensor size	1/1.7"		
Resolution	2368 × 1670		
Max. frame rate	30 fps		
Dynamic range	71.4 dB		
SNR	41 dB		
Gain	0 dB to 18 dB		
Exposure time	16 μs to 1 sec		
Pixel format	Mono 8		
Mono/color	Mono		
Electrical features			
Data interface	Fast Ethernet		
Digital I/O	17-pin M12 connector provides power, Ethernet, digital I/O, and serial port: Input signal × 2 (Line 0/1), output signal × 3 (Line 5/6/7), bi-directional I/O × 3 (Line 2/3/4), and external button input × 1. Output signal can be set as NPN or PNP.		
Power supply	24 VDC		
Max. power consumption	Approx. 48 W@24 VDC		
Mechanical			
Lens mount	M12-mount, mechanical autofocus lens		
Focal length	8 mm (0.3")	12.4 mm (0.5")	16 mm (0.6")
Lens cap	Transparent lens cap. Polarization or infrared filter lens cap is optional.		
Light source	White light by default. Red/blue/near-infrared is optional.		
Indicator	Power indicator (PWR), network indicator (LNK), status indicator (STS), result indicator (OK/NG)		
Dimension	65.2 mm × 65.2 mm × 47 mm (2.6" × 2.6" × 1.9")		
Weight	Approx. 280 g (0.6 lb.)		
Ingress protection	IP67 (under proper installation of lens and wiring)		
Temperature	Working temperature: 0 °C to 50 °C (32 °F to 122 °F) Storage temperature: -30 °C to 70 °C (-22 °F to 158 °F)		
Humidity	20% to 95% RH, non-condensing		

General

Client software	SCMVS
Certification	CE, FCC, KC

Detection Range

Lens focal length	Installation distance	Field of view	Single pixel accuracy
8 mm (0.3")	25 mm (1.0")	23.68 mm × 17.6 mm (0.9" × 0.7")	0.01 mm
	3000 mm (118.1")	2841.6 mm × 2112 mm (111.9" × 83.1")	1.2 mm
12.4 mm (0.5")	60 mm (2.4")	37.89 mm × 28.16 mm (1.5" × 1.1")	0.016 mm
	3000 mm (118.1")	1894.4 mm × 1408 mm (74.6" × 55.4")	0.8 mm
16 mm (0.6")	90 mm (3.5")	42.62 mm × 31.68 mm (1.7" × 1.2")	0.018 mm
	2000 mm (78.7")	947.2 mm × 704 mm (37.3" × 27.7")	0.4 mm

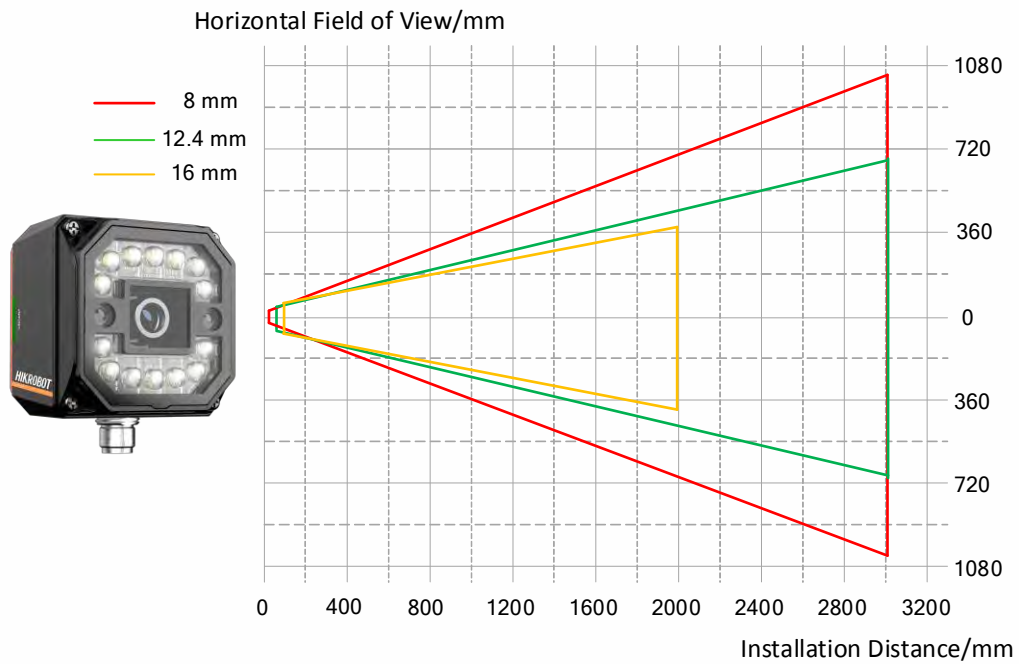

HIKROBOT

Hangzhou Hikrobot Technology Co., Ltd.
No.399 Danfeng Road, Binjiang District, Hangzhou 310051, China.
en.hikrobotics.com

MaxxVision®

Sigmaringer Str. 121
70567 Stuttgart

Tel.: 0711 997 996 3

www.maxxvision.com

Copyright Hikrobot

Hangzhou Hikrobot Technology Co., Ltd. All Rights Reserved. Hangzhou Hikrobot Technology does not tolerate any infringement. Any organization or individual may not imitate or reproduce in whole or in part of the content. The data herein is based on Hikrobot's internal evaluation. Actual data may vary depending on specific configuration and operating condition. The information herein is subject to change without notice. All the content has been checked conscientiously. Nevertheless, Hikrobot shall not be liable to damages resulting from errors, inconsistencies or omissions.