



CF-ZA-1S series, 1.1"-4/3"*1, 2.74μm, 24MP

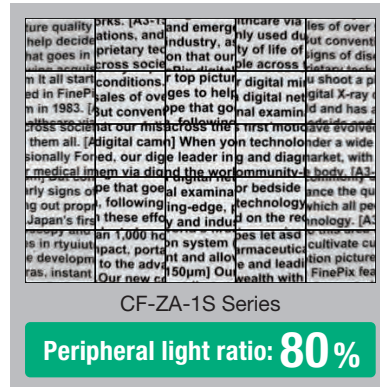

High Relative Illumination

- The advancement of image sensors for Machine Vision tends to larger sensors and smaller pixels. These sensors require a strong light transmission and a small Chief Ray Angle (CRA) so that the sufficient light reaches vertically on the photodiodes of each pixel. CF-ZA-1S series adopts rear lens groups with a large diameter enabled by FUJINON's high-precision assembly technology and achieves a CRA below 5°. This guarantees a high relative illumination across the entire image without vignetting.
- This series eliminates the need for luminance correction with image processing that just amplifies the noise.

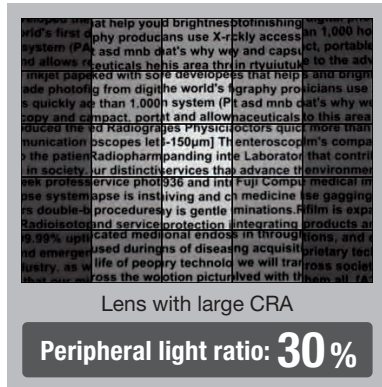


4D High Resolution performance

- Thanks to the 4D High Resolution Design, the resolving power remains consistently high from the center of the image to the edges, even at changing working distances or aperture settings.
- The CF-ZA-1S series draws out the full capability of cameras equipped with a 1.1" sensor with 3.45 μm pixel pitch (equivalent to 12 MP) across the entire frame. These lenses are the perfect choice especially for IMX253 (1.1" type sensor) and IMX225 (1" type sensor).
- The series supports next generation sensors with 1.2" optical format and 2.74μm pixel pitch (equivalent to 24 MP).

"4D High Resolution" lenses

General machine vision camera

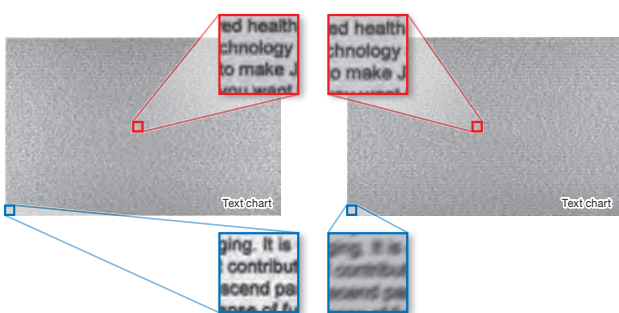

Anti-Vibration and Shock Design

- This series maintains an advanced level of resolution before and after tough vibration tests, conducted according to JIS C 60068-2-6*2. Even in applications that involve shocks, such as robot vision and 3D scanners, the optical axis shift remains less than 10μm for shocks of up to 10G*3.
- The Fujifilm original mechanical design*4 minimizes the use of adhesive to avoid aged deterioration caused by humidity and heat.

High usability and reliability

- These lenses come with knurled screws for fixing the iris and focus position. The screws can't fall out accidentally, get lost or damage sensitive manufacturing machines during installation or maintenance.



Compact size of only 39mm outer diameter

- Despite the support of sensors with large 1.2" format, all models of the CF-ZA-1S series offer a uniform diameter of only 39mm and are therefore no larger than standard machine vision cameras. Only the 8mm focal length CF8ZA-1S is slightly larger with a diameter of 54mm in the front lens.



- Thanks to the 3 holes on the lens barrel for fixing iris and focus positions, the most suitable hole can be selected for each application.
- By adopting an internal mechanical focus, the overall length of lens will not change when focused.
- The introduction of a focusing indicator at the working distance of 50cm enables efficient detection of cameras' flange back deviation.




*1 Sensor size(max.): Adaptable sensor size varies depending on the model. Please check the amount of light and resolution on the edges pertaining to your particular application. *2 Compliance with JIS C 60068-2-6: Vibration frequency 10-60Hz (amplitude 0.75mm) vibration frequency 60-500Hz (acceleration 100m/S²) and 50 sweep cycles. *3 Supported shock G value varies from model to model. *4 FUJIFILM's patent-pending proprietary technology.




Anti Shock & Vibration Anti Shock & Vibration Anti Shock & Vibration Anti Shock & Vibration Anti Shock & Vibration Anti Shock & Vibration

	CF8ZA-1S	CF12ZA-1S	CF16ZA-1S	CF25ZA-1S	CF35ZA-1S	CF50ZA-1S
Focal length [mm]	8	12	16	25	35	50
Iris range [F. no]	F1.8-F16	F1.8-F16	F1.8-F16	F1.8-F16	F1.8-F16	F2.4-F16
Angle of view	85.7°×67.5°	62.5°×47.8°	47.3°×36.1°	32.9°×24.8°	23.0°×17.3°	16.6°×12.5°
Working Distance*1 [mm]	∞-100	∞-100	∞-100	∞-100	∞-200	∞-200
Operation of focus	Manual	Manual	Manual	Manual	Manual	Manual
Operation of iris	Manual	Manual	Manual	Manual	Manual	Manual
Filter thread [mm]	M52×0.75	M37.5×0.5	M37.5×0.5	M37.5×0.5	M37.5×0.5	M37.5×0.5
Mount	C-mount	C-mount	C-mount	C-mount	C-mount	C-mount
Weight (approx.) [g]	180	180	180	170	165	155
Sensor size (std.)*2	1.1"(2.5μm)	1.1"(2.5μm)	1.1"(2.5μm)	1.1"(2.5μm)	1.1"(2.5μm)	1.1"(2.5μm)
	1.2"(2.74μm)	1.2"(2.74μm)	1.2"(2.74μm)	1.2"(2.74μm)	1.2"(2.74μm)	1.2"(2.74μm)
Sensor size (max.)*3	-	-	-	4/3"(3.45μm)	4/3"(3.45μm)	4/3"(3.45μm)
CRA (Chief Ray Angle)	4.5	4.5	4.9	2.7	4.5	4.8
TV distortion [%]	-4.81	-2.82	-0.80	-0.83	-0.32	-0.17
Dimension [mm]	ø54×67	ø39×67.6	ø39×67.6	ø39×67.3	ø39×67.3	ø39×68


CF8ZA-1S

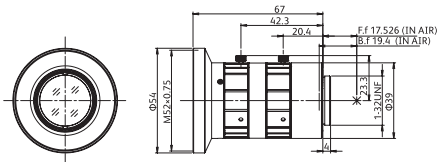


CF12ZA-1S

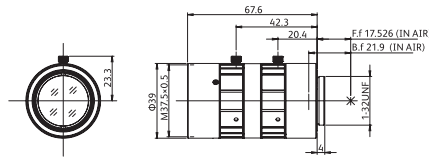


CF16ZA-1S

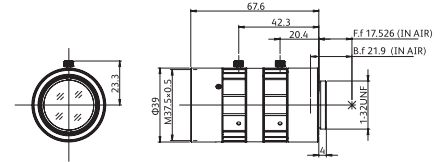


CF25ZA-1S

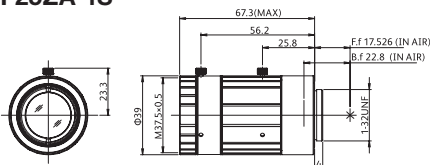

CF35ZA-1S

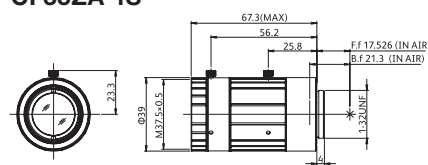

CF50ZA-1S

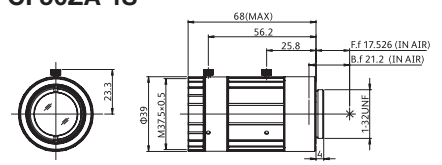

*1 From front of lens barrel. *2 Sensor size(std.): Ideal size to maximize the target resolution.

*3 Sensor size(max.): Adaptable sensor size varies depending on the model. Please check the amount of light and resolution on the edges pertaining to your particular application.

NEW HF-XA-1F Series

2/3" ~ 1/1.2"
3.45µm (5MP)
focal lengths 8mm ~ 35mm

Anti Shock & Vibration



- Based on the optical design of HF-XA-5M Series: same optical specification
- Advanced mechanical design with fix iris and robust focussing system
- Ideally suited for 3D Cameras


Specification	HF8XA-1F	HF12XA-1F	HF16XA-1F	HF25XA-1F	HF35XA-1F
Focal Length (mm)	8	12	16	25	35
Applicable Sensor Size	2/3"	1/1.2"	1/1.2"	1/1.2"	1/1.2"
Applicable Pixel Size	3.45 µm				
Iris Range	F1.6, F4.0, F8.0			F1.6, F4.6, F9.2	F1.9, F5.2, F10.4
Operation Iris	Fix iris, 3 plates switchable				
Operation Focus	focussing by screw mount, fixation with nut				
MOD (mm)	100	100	100	150	300
Angle of view (HxV) (2/3")	58.4° x 44.6°	40.1° x 30.3°	31.4° x 23.7°	19.9° x 15.0°	14.2° x 10.7°
Weight (g)	97	99	94	87	75
Dimensions (mm)	Ø34x60.2	Ø34x58.7	Ø34x54.0	Ø34x55.4	Ø34x50.3
Filter Thread	M25.5x0.5	M25.5x0.5	M25.5x0.5	M25.5x0.5	M25.5x0.5
TV Distortion	-1.99%	-1.26%	-0.6%	-0.07%	+0.1%
Mount	C				

HF-XA-1F Iris System:

3 different iris plates for fix iris easily switchable




3 plates are provided with each lens

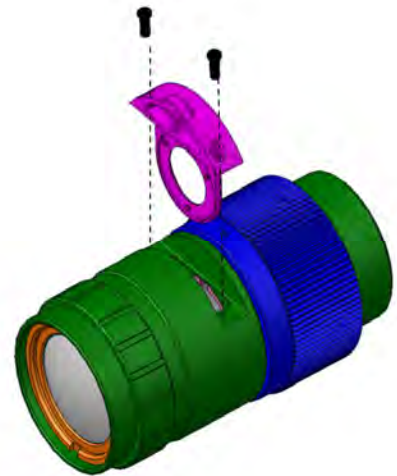


HF-XA-1F Focus System:

Lens


Camera

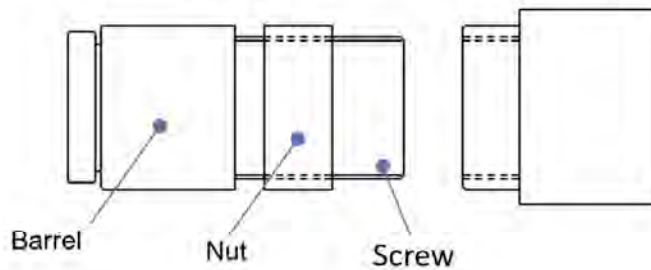

Mounting and focussing at the same time

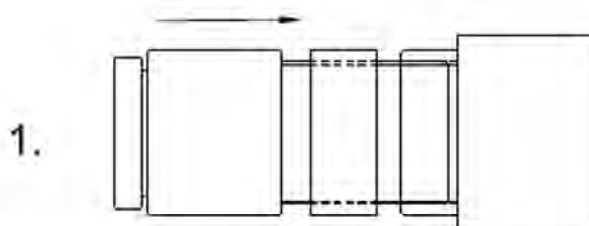

Focus:
Screw lens barrel until focus is set

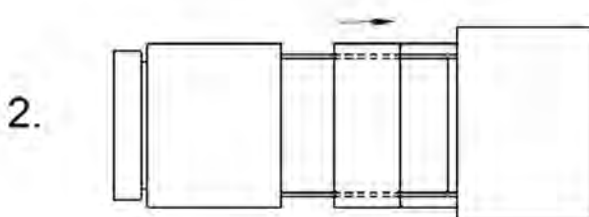

Lock focus:
Move nut for fixation

Europe / Middle East / Africa

FUJIFILM Electronic Imaging Europe GmbH

Fujistrabe 1, 47533 Kleve, Germany
TEL: +49 (0) 2821 7115 400, FAX: +49 (0) 2821 7115 400
E-mail: cctv_eu@fujifilm.com

FUJIFILM España. Fujifilm Europe GmbH. Sucursal en España

Calle Virgilio 25 A, 1ª planta, Local C
Edificio Ayessa II - Ciudad de la Imagen
28223 Pozuelo de Alarcón, Madrid, Spain
TEL: +34 914 670 479
E-mail: imaging_feg-es@fujifilm.com

FUJIFILM France

5 avenue des CHAUMES - CS 40760 MONTIGNY
78066 SAINT QUENTIN EN YVELINES CEDEX - FRANCE
TEL: +33 (0) 1 30 14 34 5, Fax: +33 (0) 1 34 60 57 45

FUJIFILM Italia S.p.A.

S.S.11 Padana Superiore 2/B
20063 Cernusco Sul Naviglio (MI) ITALY
TEL: +39 02 929741
E-mail: optical_devices_ffit@fujifilm.com

FUJIFILM Nordic AB

Hantverkargatan 25B
SE-112 21 Stockholm / Sweden
TEL: +46 (8) 525 23 760
E-mail: opticaldevices_nordic.fnr@fujifilm.com

FUJIFILM RUS LLC

1st Magistralnyi tupik, 5A Business Centre
"Magistral Plaza" 4th floor 123290, Moscow, Russia
TEL: +7 495 797 3512, Fax: +7 495 797 3513
E-mail: info_ffru@fujifilm.com

FUJIFILM Dış Ticaret A.Ş.

Pürtelaş Hasan Efendi Mah. Meclis-i Mebusan Cad. No: 37/A
Beyoğlu İstanbul, Türkiye
TEL: +90 212 709 92 42, Fax: +90 212 698 99 70
Email: fujinon@fujifilm.com.tr

FUJIFILM UK Ltd.

88 Bushy Road (c/o Racetech), Raynes Park, Merton,
London SW20 0JH, UK
TEL: +44 (0) 208-944-4246
E-mail: lenses_uk@fujifilm.com

FUJIFILM Middle East

Jafza view 19 building, 23rd floor, Downtown Jebel Ali
P.O Box: 17212, Dubai, UAE
TEL: +971-4-887-8722

China

**FUJIFILM (China) Investment Co., Ltd.
Optical Device Business Division**

28F, Shanghai ONELUJIAZUI, No.68 YinCheng Road(M),
Pudong New Area, Shanghai, P.R.China 200120
TEL: +86-21-5010-6000 *384
FAX: +86-21-5010-6730

Hong Kong / Taiwan

**FUJIFILM Hong Kong Limited
Optical Device Division**

Unit 1001-1007, 10/F., Metroplaza Tower 2,
223 Hing Fong Road, Kwai Fong, N.T., Hong Kong.
Tel: (852) 2376-0998 Fax: (852) 2724-1118

Southeast Asia & West Asia

FUJIFILM Asia Pacific Pte Ltd.

10 New Industrial Road, Fujifilm Building Singapore 536201
TEL: +65 (0)63839933 FAX: +65 (0)63835666

Japan / North East Asia

FUJIFILM Corporation

Optical Device & Electronic Imaging Products Div.
1-324 Uetake, Kita-ku, Saitama City Saitama, 331-9624, Japan
TEL: +81 (0)48-668-2152 FAX: +81 (0)48-651-8517

Oceania

FUJIFILM Australia Pty Ltd.

114 Old Pittwater Road, Brookvale, N.S.W. 2100, Australia
TEL: +61 (0)2-9466-2600 FAX: +61 (0)2-9905-3801

North & Latin America

**FUJIFILM North America Corporation
Optical Devices Division**

10 High Point Drive, Wayne, NJ 07470
TEL: +1-973-633-5600 FAX: +1-973-633-5216

Authorized Fujifilm Service Agent.

MaxxVision®

Sigmaringer Str. 121
70567 Stuttgart
Tel.: 0711 997 996 3
www.maxxvision.com

Due to a continuous process of product improvement, design and specifications are subject to change without notice.
All photos, illustrations, drawings and other images in this brochure are intended for illustrative purpose only.



For your safety
Be certain to read the instructions for use before using any equipment.

FFBX2022.02-K