

TH17V1311-34

- Cost effective lens for high volume application
- Designed for uncooled IR sensors
- Optimized for the 8-12μm wavelength range




Property	Value	Remarks
Optical		
Focal Length	13mm	
F/#	1.1	
Horizontal Filed of View	50.3° (A) / 36.2° (B)	
Image Circle	13.6mm	
Focus Adjustment	Manual	
Lens transmission (average)	0.78	wavelength 8-12μm
Coating Type	AR Coating*1	wavelength 8-12μm
Mechanical		
Weight	19g	
Lens Mount	Threaded	M25 × 0.5(Pitch)[mm]
Environmental		
Operating Temperature	-40°C to +80°C	Athermalized

*1 Environmental Test (MIL-F-48616)


Adhesion	Tape Test
Humidity	85°C/95%X1000h
Abrasion	Severe 20 stroke
Temperature Shock	-40°C to 100°C X1000cycle
High/Low Temperature	100°C X750h / -57°C X570h

Type	Pitch	Pixels
A	17μm	640x480 (VGA)
B	25μm	320x240 (QVGA)

MTF

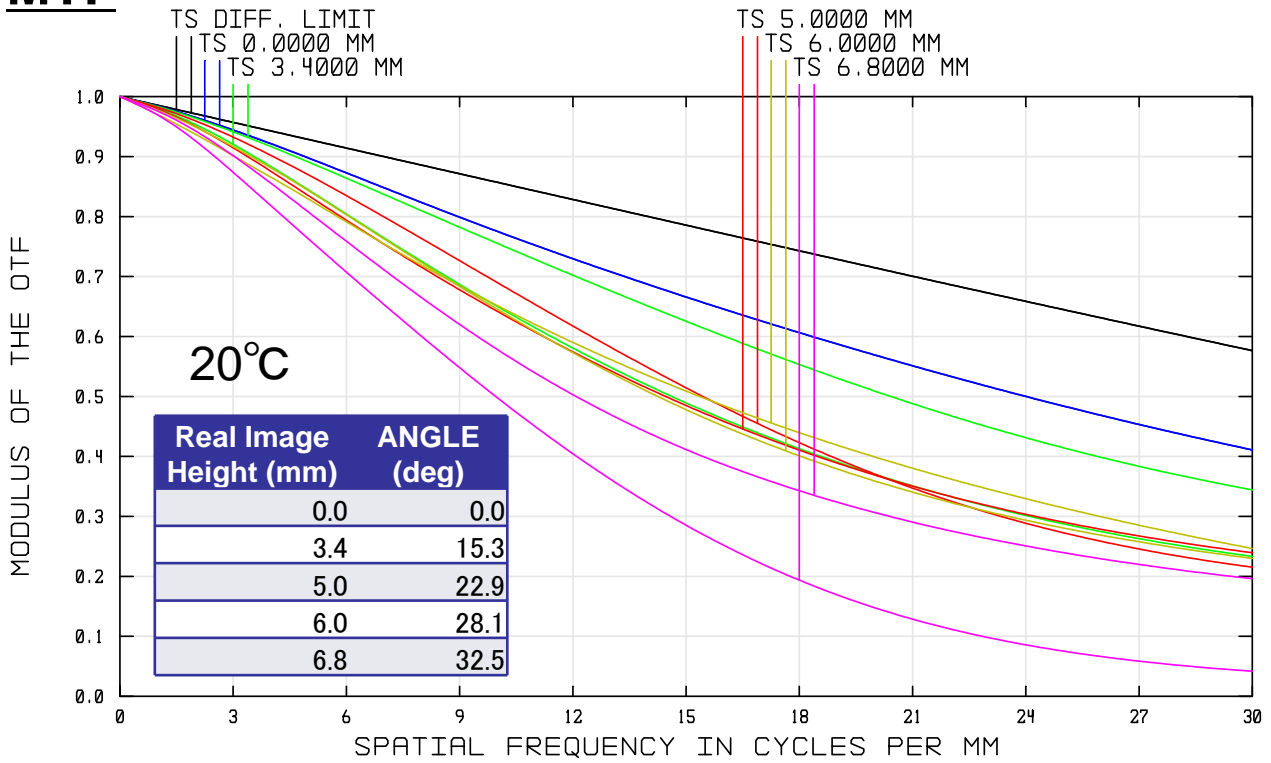

Dimensions

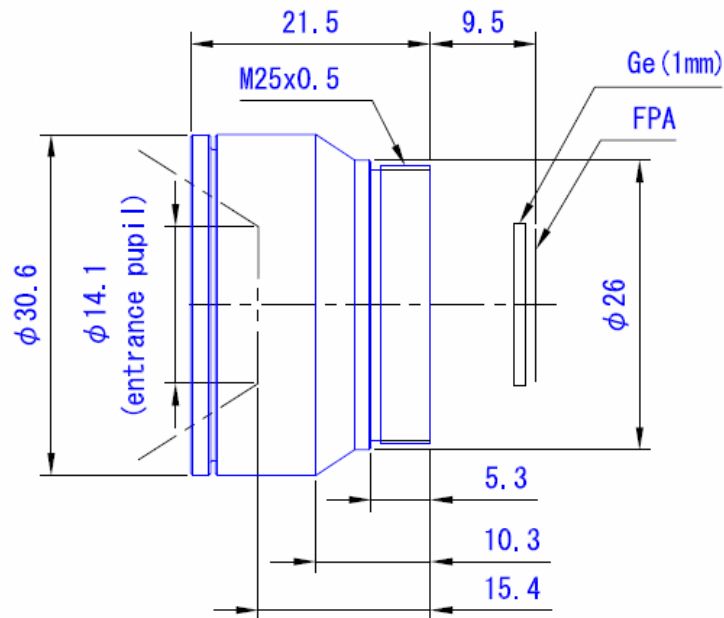

Distributed by:

MaxxVision®

Sigmaringer Str. 121
 70567 Stuttgart
 Tel.: +49 711 997 996 3
 Fax: +49 711 997 996 50
 www.maxxvision.com
 info@maxxvision.com