

LENS OB-SWIR35/2 – P/N C0839

General Description

This family of high resolution SWIR lenses image from 0.9 – 2.3 μm making them especially well-suited for PCB inspection, special laser applications, surveillance and alignment and tracking. A high F/N and excellent transmission characteristics allow superior imaging in these wavelengths of interest.



Optical and mechanical parameters

Focal length	35 mm
Image format (diagonal)	20.5 mm
F.O.V. (diagonal)	32.6 degrees
Max aperture	F/N = 2
Object format	N.A.
Min working distance	2000 mm
Zoom value	N.A.
Focus	Manual
Iris	Max F/N = 2 Min F/N = N.A.

N. of elements	9
Dimensions	Dia 107 x 123 mm
Weight	N.A.
Options	
Motorized focus	Upon request
Motorized iris	Upon request
Motorized zoom	N.A.
Other mount type	Upon request
Customization	Upon request

36


P/N	wavelength range	mount type	note
C0839.001	900-1700 nm	Canon FD	With iris diaphragm
C0839.002		Nikon	
C0839.003		M42 Screw	
C0839.005	1700-2300 nm	Canon FD	
C0839.006		Nikon	
C0839.007		M42 Screw	
C0839.010	900-2300 nm	Canon FD	
C0839.011		Nikon	
C0839.012		M42 Screw	

P/N	wavelength range	mount type	note
C0839.071	900-1700 nm	Canon FD	With motorized iris
C0839.072		Nikon	
C0839.073		M42 Screw	
C0839.081	1700-2300 nm	Canon FD	
C0839.082		Nikon	
C0839.083		M42 Screw	
C0839.091	900-2300 nm	Canon FD	
C0839.092		Nikon	
C0839.093		M42 Screw	
C0839.074	900-1700 nm	Canon FD	With motorized focus
C0839.075		Nikon	
C0839.076		M42 Screw	
C0839.084	1700-2300 nm	Canon FD	
C0839.085		Nikon	
C0839.086		M42 Screw	
C0839.094	900-2300 nm	Canon FD	
C0839.095		Nikon	
C0839.096		M42 Screw	
C0839.077	900-1700 nm	Canon FD	With motorized iris and focus
C0839.078		Nikon	
C0839.079		M42 Screw	
C0839.087	1700-2300 nm	Canon FD	
C0839.088		Nikon	
C0839.089		M42 Screw	
C0839.097	900-2300 nm	Canon FD	
C0839.098		Nikon	
C0839.099		M42 Screw	

More details are available upon request and technical drawings are open for the customers and their needs.

MTF, Field Curvature, Distortion and Transmission from 900 to 1700 nm

The calculated MTF values are displayed below and are verified at the maximum F/N and the best focus plane. The colored lines represent the F.O.V. starting from the center (0%) to the corner (100%).

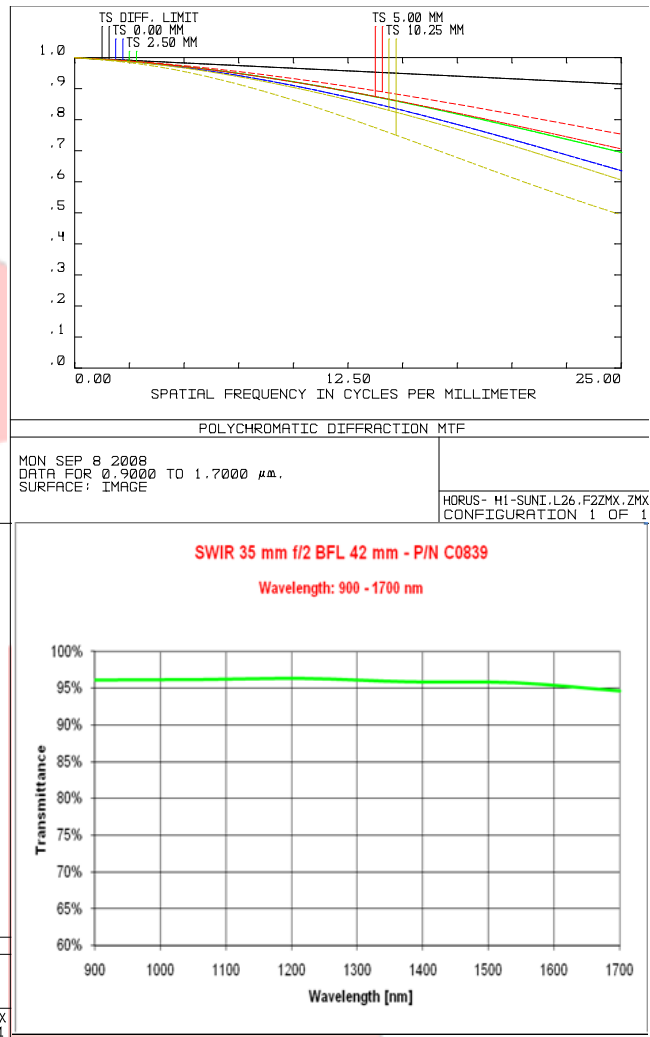


Optical parameters for wavelength range 0.9 – 1.7 μm

Resolution	MTF >50% @25lp/mm
Distortion	< 2.5%
Average axial chromatic aberration	<0.0285 mm



Glass Transmission without coating	> 95%
Antireflection Coating	R ≤ 1%
Vignetting	0%

MTF, Field Curvature, Distortion and Transmission from 1700 to 2300 nm

The calculated MTF values are displayed Below and are verified at the maximum F/N and the best focus plane. The colored lines represent the F.O.V. starting from the center (0%) to the corner (100%).

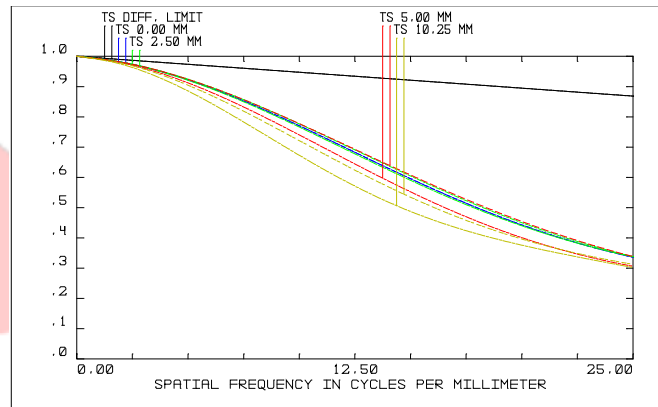

POLYCHROMATIC DIFFRACTION MTF
 MON SEP 8 2008
 DATA FOR 1.7000 TO 2.3000 μm.
 SURFACE: IMAGE
 HORUS - HI-SUNI.L26.F2- 1700-2300.ZMX
 CONFIGURATION 1 OF 1

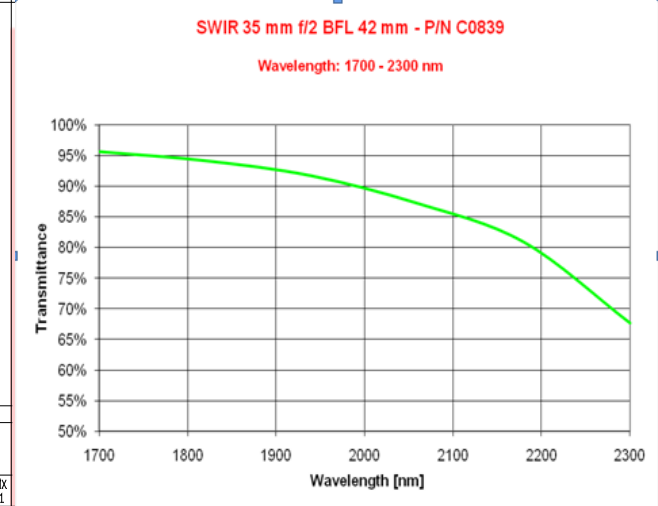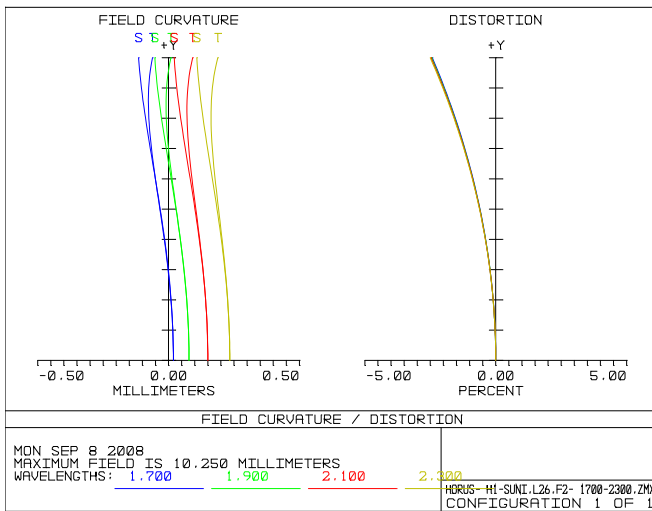


Optical parameters for wavelength range 1.7 – 2.3 μm

Resolution	MTF > 30% @25lp/mm
Distortion	< 3.5%



Glass Transmission without coating	> 68%
Antireflection Coating	R ≤ 1%

MTF, Field Curvature, Distortion and Transmission from 900 to 2300 nm

The calculated MTF values are displayed Below and are verified at the maximum F/N and the best focus plane. The colored lines represent the F.O.V. starting from the center (0%) to the corner (100%).

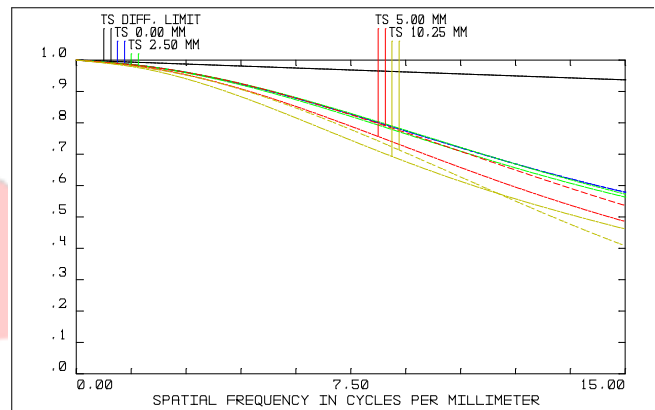

POLYCHROMATIC DIFFRACTION MTF
 MON AUG 31 2009
 DATA FOR 0.9000 TO 2.3000 μm.
 SURFACE: IMAGE
 HORUS- HI-SUNI.L26.F2.900-2300.ZMX
 CONFIGURATION 1 OF 1

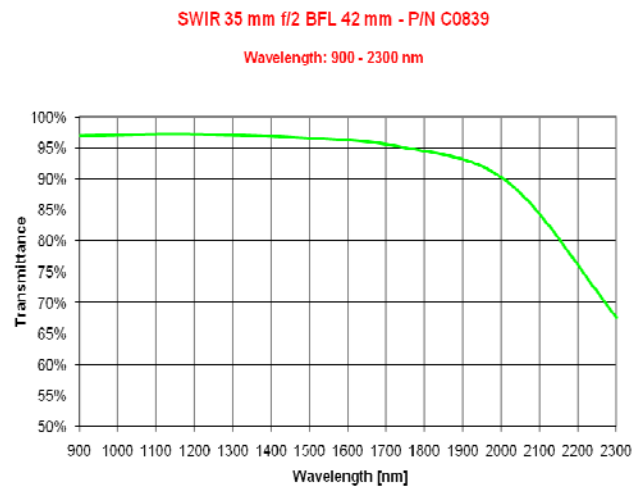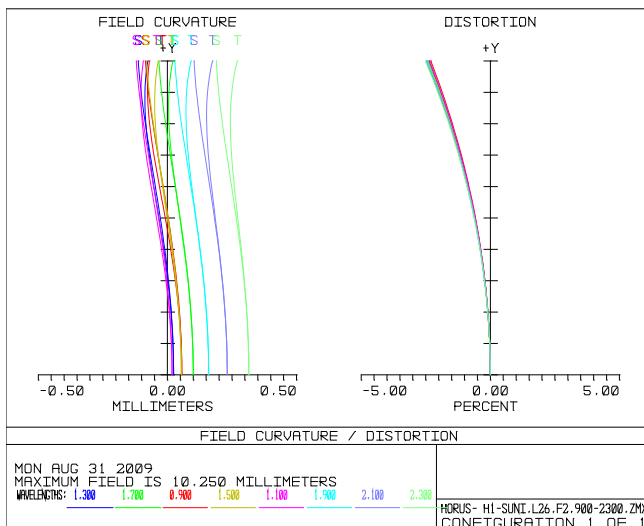

Optical parameters for wavelength range 0.9 – 2.3 μm

Resolution	MTF > 40% @ 15lp/mm
Distortion	< 2.5%

Glass Transmission without coating	> 67%
Antireflection Coating	R ≤ 1%

Electrical data & Interfaces


IRIS FUNCTION

Motor model	Faulhaber 1516T009SR
Motor nominal voltage	9 VDC
Motor maximum power	0.54 W
Current limit	0.19 A
Feedback	10 kOhm multi-turn potentiometer
Potentiometer model	Spectrol 533-10K $\pm 5\%$
Gearhead reduction ratio	592:1

FOCUS FUNCTION

Motor model	Faulhaber 1516T009SR
Motor nominal voltage	9 VDC
Motor maximum power	0.54 W
Current limit	0.19 A
Feedback	10 kOhm multi-turn potentiometer
Potentiometer model	Spectrol 533-10K $\pm 5\%$
Gearhead reduction ratio	592:1

Hirose HR10A-10P-12P connector Pin list

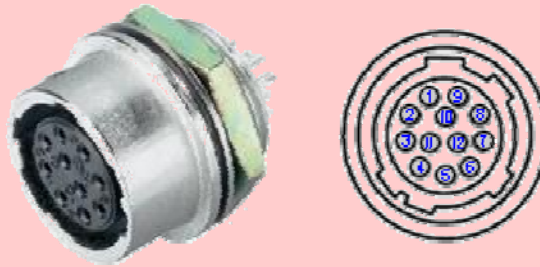

41

PIN	MOTORIZED IRIS	MOTORIZED FOCUS	MOTORIZED IRIS & FOCUS
1	Vcc	Vcc	Vcc
2	Gnd	Gnd	Gnd
3	NA	Analog Focus position	Analog Focus position
4	Analog Iris position	NA	Analog Iris position
5	Identification resistor #1	Identification resistor #1	Identification resistor #1
6	Identification resistor #2	Identification resistor #2	Identification resistor #2
7	NA	Focus Motor +	Focus Motor +
8	NA	Focus Motor -	Focus Motor -
9	Iris Motor +	NA	Iris Motor +
10	Iris Motor -	NA	Iris Motor -

Every shipped motorized lens will be provided with potentiometers values of end positions for both focus and iris motor

MaxxVision®

Sigmaringer Str. 121
70567 Stuttgart
Tel.: 0711 997 996 3
www.maxxvision.com


optec S.p.A.
OPTICAL & OPTOELECTRONIC SYSTEMS