


Diffusing Plate for Bar Light / IKBA

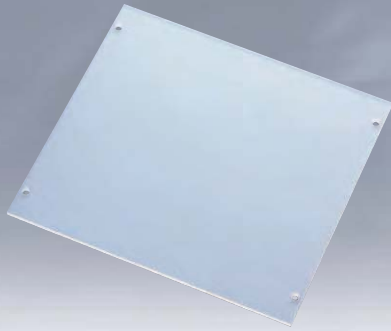


- This diffusing plate is specialized for the bar light. It diffuses the light and reduces the shadow of LED elements on a work.
- It controls the transmissivity (diffusion rate). The standard transmissivity is 80%; however, variations of 60% and 30% are available with the same thickness.
- A special custom size is also available. The bar light device is manufactured in different ways depending on whether or not a diffusing plate is used. When you order the light, please specify use of a diffusing plate.

Thickness: 2 mm

Model name	Applicable Light	Model name	Applicable Light	Model name	Applicable Light
IKBA-11/14-80	IDBA-C11/14□	IKBA-100/15-80	IDBA-C100/15□	IKBA-100/100-80	IDBA-C100/100□
IKBA-15/26-80	IDBA-C15/26□	IKBA-140/11-80	IDBA-C140/11□	IKBA-15/200-80	IDBA-C15/200□
IKBA-25/25-80	IDBA-C25/25□	IKBA-132/15-80	IDBA-C132/15□	IKBA-185/30-80	IDBA-C185/30□
IKBA-50/15-80	IDBA-C50/15□	IKBA-72/24-80	IDBA-C72/24□	IKBA-300/24-80	IDBA-C300/24□
IKBA-27/34-80	IDBA-C27/34□	IKBA-50/50-80	IDBA-C50/50□		
IKBA-100/11-80	IDBA-C100/11□	IKBA-70/75-80	IDBA-C70/75□		

*The above models have the standard transmissivity of 80%. The model name has an extension of 60 at the end for the transmissivity of 60%, and in the same way, 30 for 30%

Polarizing Plate (PL Plate) / IKBA-PL IKR-PL IKR-F PL

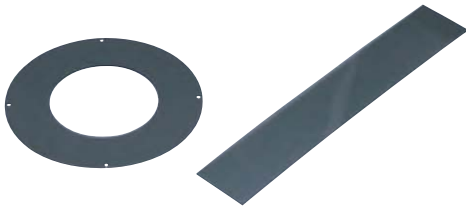


- This PL plate or PL filter is attached to a lighting device and a camera lens to remove gloss and surface reflection of the work.
- It is fixed with screws, in the same way as a diffusing plate.
- The polarizing plate for bar light is grouped into type A and type B according to the polarizer direction.

For Bar Light / IKBA-PL

Model name		Applicable Light	Model name		Applicable Light
IKBA-11/14-A-PL	IKBA-11/14-B-PL	IDBA-C11/14□	IKBA-72/24-A-PL	IKBA-72/24-B-PL	IDBA-C72/24□
IKBA-15/26-A-PL	IKBA-15/26-B-PL	IDBA-C15/26□	IKBA-50/50-A-PL	IKBA-50/50-B-PL	IDBA-C50/50□
IKBA-25/25-A-PL	IKBA-25/25-B-PL	IDBA-C25/25□	IKBA-70/75-A-PL	IKBA-70/75-B-PL	IDBA-C70/75□
IKBA-50/15-A-PL	IKBA-50/15-B-PL	IDBA-C50/15□	IKBA-100/100-A-PL	IKBA-100/100-B-PL	IDBA-C100/100□
IKBA-27/34-A-PL	IKBA-27/34-B-PL	IDBA-C27/34□	IKBA-15/200-A-PL *	IKBA-15/200-B-PL *	IDBA-C15/200□
IKBA-100/11-A-PL	IKBA-100/11-B-PL	IDBA-C100/11□	IKBA-185/30-A-PL *	IKBA-185/30-B-PL *	IDBA-C185/30□
IKBA-100/15-A-PL	IKBA-100/15-B-PL	IDBA-C100/15□	IKBA-300/24-A-PL *	IKBA-300/24-B-PL *	IDBA-C300/24□
IKBA-132/15-A-PL	IKBA-132/15-B-PL	IDBA-C132/15□			

*The lighting device has to be reformed for attaching a polarizing plate. For details, please contact us.

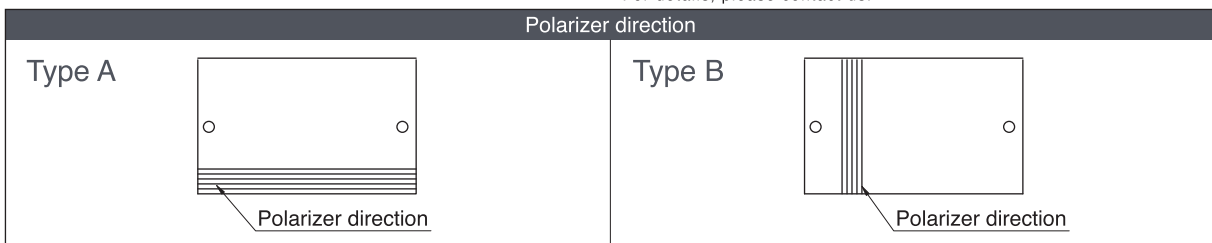

For Ring Light / IKR-PL IKR-F PL

Model name	Applicable Light	Model name	Applicable Light	Model name	Applicable Light
IKR-32/10-PL	IDR-32/10□	IKR-66/32-PL	IDR-66/36□	IKR-140/91-PL	IDR-140/95□
IKR-38/15-PL	IDR-38/15□	IKR-70/39-PL	IDR-70/39□	IKR-F43/15-PL	IDR-F43/15□
IKR-38/12-PL	IDR-38/15□	IKR-70/35-PL	IDR-70/39□	IKR-F50/15-PL	IDR-F50/15□
IKR-40/25-PL	IDR-40/25□	IKR-90/50-PL	IDR-90/50□	IKR-F60/32-PL	IDR-F60/32□
IKR-40/21-PL	IDR-40/25□	IKR-90/46-PL	IDR-90/50□	IKR-F70/37-PL	IDR-F70/37□
IKR-50/28-PL	IDR-50/28□	IKR-110/60-PL	IDR-110/60□	IKR-F90/50-PL	IDR-F90/50□
IKR-50/24-PL	IDR-50/28□	IKR-110/56-PL	IDR-110/60□	IKR-F100/50-PL	IDR-F100/50□
IKR-66/36-PL	IDR-66/36□	IKR-140/95-PL	IDR-140/95□	IKR-F110/60-PL	IDR-F110/60□